

Service Manual



ORDER NO.
ARP2228

COMPACT DISC PLAYER

PD-31

PD-8700 PD-8700-S PD-7700 PD-7700-S

PD-31, PD-8700, PD-8700-S, PD-7700 AND PD-7700-S HAVE THE FOLLOWING :

Type	Model					Power Requirement	Remarks
	PD-31	PD-8700	PD-8700-S	PD-7700	PD-7700-S		
KU	○	—	—	○	—	AC120V only	
KC	—	—	—	○	—	AC120V only	
HEM	—	○	—	○	—	AC220-230V, AC230-240V(switchable)*	
HB	—	○	—	○	—	AC220-230V, AC230-240V(switchable)*	
SD	—	○	—	○	—	AC110V, 120-127V, 220V, 240V(switchable)	
HEWM	—	—	○	—	○	AC220-230V, AC230-240V(switchable)*	
HPW	—	—	—	○	—	AC220-230V, AC230-240V(switchable)*	

* : Change the primary wiring of the power transformer.

- This manual is applicable to the PD-31/KU, PD-8700/HEM, HB, SD, PD-8700-S/HEWM, PD-7700/KU, KC, HEM, HB, SD, HPW and PD-7700-S/HEWM types.
- As to the PD-8700/HEM, HB, SD AND PD-8700-S/HEWM types, refer to page 81.
- As to the PD-7700/KU, KC, HEM, HB, SD, HPW and PD-7700-S/HEWM types, refer to page 83.
- Ce manuel pour le service comprend les explications de réglage en français.
- Este manual de servicio trata del método ajuste escrito en español.

CONTENTS

1. SAFETY INFORMATION	2	6. AJUSTE	65
2. EXPLODED VIEWS AND PARTS LIST	4	7. FL INFORMATION	80
3. P.C.B.'s PARTS LIST	11	8. FOR PD-8700/HEM, HB, SD AND PD-8700-S/HEWM TYPES	81
4. PACKING	14	9. FOR PD-7700/KU, KC, HEM, HB, SD, HPW AND PD-7700-S/HEWM TYPES	83
5. SCHEMATIC DIAGRAM AND P.C. BOARDS CONNECTION DIAGRAM	15	10. PANEL FACILITIES	101
6. ADJUSTMENTS	35	11. SPECIFICATIONS	103
6. RÉGLAGE	50		

PIONEER ELECTRONIC CORPORATION 4-1, Meguro 1-Chome, Meguro-ku, Tokyo 153, Japan
PIONEER ELECTRONICS SERVICE INC. P.O. Box 1760, Long Beach, California 90801 U.S.A.
PIONEER ELECTRONICS OF CANADA, INC. 505 Coxbrane Drive, Markham, Ontario L3R 8E3 Canada
PIONEER ELECTRONIC (EUROPE) N.V. Keetbergplein 1, 9120 Beveren, Belgium
PIONEER ELECTRONICS AUSTRALIA PTY. LTD. 178-184 Boundary Road, Braeside, Victoria 3195, Australia TEL: (03) 580-9911
 © PIONEER ELECTRONIC CORPORATION 1991

FI APR. 1991 Printed in Japan

This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual.

Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.

WARNING

Lead in solder used in this product is listed by the California Health and Welfare agency as a known reproductive toxicant which may cause birth defects or other reproductive harm (California Health & Safety Code, Section 25249.5).

When servicing or handling circuit boards and other components which contain lead in solder, avoid unprotected skin contact with the solder. Also, when soldering do not inhale any smoke or fumes produced.

1. SAFETY INFORMATION


(FOR USA MODEL ONLY)

1. SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

LEAKAGE CURRENT CHECK

Measure leakage current to a known earth ground (water pipe, conduit, etc.) by connecting a leakage current tester such as Simpson Model 229-2 or equivalent between the earth ground and all exposed metal parts of the appliance (input/output terminals, screwheads, metal overlays, control shaft, etc.). Plug the AC line cord of the appliance directly into a 120V AC 60Hz outlet and turn the AC power switch on. Any current measured must not exceed 0.5mA.



AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

2. PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in the appliance have special safety related characteristics. These are often not evident from visual inspection nor the protection afforded by them necessarily can be obtained by using replacement components rated for voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual.

Electrical components having such features are identified by marking with a Δ on the schematics and on the parts list in this Service Manual.

The use of a substitute replacement component which does not have the same safety characteristics as the PIONEER recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current PIONEER Service Manual. A subscription to, or additional copies of, PIONEER Service Manual may be obtained at a nominal charge from PIONEER.

(FOR EUROPEAN MODEL ONLY)

VARO!
AVATTAESSA JA SUOJALUKITUS
OHITETTAESSA OLET ALTIINA
NAKYMATTOMALLE LASERSÄTEILYLLE.
ÄLÄ KATSO SÄTEESEEN.

ADVARSEL:
USYNLIG LASERSTRÅLING VED ÅBNING
NÅR SIKKERHEDSAFBRYDERE ER UDE AF
FUNKTION UDGÅR UDSÆTTELSE FOR
STRÅLING.

VARNING!
OSYNLIG LASERSTRÅLING NÅR DENNA
DEL ÄR ÖPPNAD OCH SPÄRREN
ÄR URKOPPLAD. BETRÄKTA EJ STRÅLEN.



LASER
Kuva 1
Lasersäteilyn
varoituserkki

WARNING!
DEVICE INCLUDES LASER DIODE WHICH
EMITS INVISIBLE INFRARED RADIATION
WHICH IS DANGEROUS TO EYES. THERE IS
A WARNING SIGN ACCORDING TO PICTURE
1 INSIDE THE DEVICE CLOSE TO THE LASER
DIODE.



LASER
Picture 1
Warning sign for
laser radiation

IMPORTANT
THIS PIONEER APPARATUS CONTAINS
LASER OF HIGHER CLASS THAN 1.
SERVICING OPERATION OF THE APPARATUS
SHOULD BE DONE BY A SPECIALLY
INSTRUCTED PERSON.



LASER DIODE CHARACTERISTICS
MAXIMUM OUTPUT POWER: 5 mw
WAVELENGTH: 780-785 nm

LABEL CHECK

HB, HEM and HEWM types



HEM and HEWM types



HEM and HEWM types

HB type

Additional Laser Caution

1. Laser Interlock Mechanism

The ON/OFF (ON: low level, OFF: high level) status of the LPS1 (S601) and LPS2 (S602) switches for detecting the loading state is detected by the system microprocessor, and the design prevents laser diode oscillation when both switches LPS1 and LPS2 are not ON (low level) (clamped state). Thus, interlock will no longer function if switches LPS1 (S601) and LPS2 (S602) are deliberately shorted. Also, in the test mode*, the interlock mechanism does not operate too. Laser diode oscillation will continue if pins 2 and 3 of CXA14715 (IC101) are connected to ground or pin 20 is connected to high level (ON) or the terminals of Q101 are shorted to each other (fault condition).

2. When the cover is opened with the servo mechanism block removed to be turned over, close viewing of the objective lens with the naked eye will cause exposure to a Class 1 or higher laser beam.

* Refer to page 35.

2. EXPLODED VIEWS AND PARTS LIST

NOTES:


- Parts without part number cannot be supplied.
- Parts marked by "●" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.


2.1 EXTERIOR

Parts List of Exterior


Mark	No.	Description	Parts No.	Mark	No.	Description	Parts No.
Δ ●	1	Mother board assembly	PWM1448		101	Name plate (ABS)	
Δ	2	Strain relief	CM-22C		102	SW board assembly	
	3	AC power cord	PDG1015		103	Under base	
Δ	4	Power transformer S (AC120V)	PTT1179		104	Audio angle	
Δ	5	Power transformer A (AC120V)	PTT1183		105	Rear base	
	6	Stopper	PNM1134		106	Headphone angle	
	7	Insulator	PNW2020		107	Spacer	
	8	Cord clasper	RNB-184		108	Loading mechanism assembly	
	9	Power button	PAC1569		109	Front panel	
	10	Select button	PAC1570		110	Headphone board assembly	
	11	Play button	PAC1571		111	Jack board assembly	
	12	Search button	PAC1572		112	S trans board assembly	
	13	Display window	PAM1503		113	A trans board assembly	
	14	Control panel	PNW1948				
	15	Tray lens	PNW1950				
	16	LED lens	PNW2019				
	17	Tray panel	PNW2025				
	18	Slide knob	RAC1428				
	19	Knob C	RAC1608				
	20	BIAS lens	RNK1674				
	21	Front panel assembly	PEA1164				
	22	Bonnet	PYY1148				
●	23	Audio board assembly	PWZ2118				
●	24	Operate board assembly	PWZ2112				
	25	Screw	BBT30P080FZK				
	26	Screw	BBZ30P060FMC				
	27	Screw	BBZ30P080FCC				
	28	Screw	BBZ30P080FCC				
	29	Screw	BBZ30P120FMC				
	30	Screw	BBZ30P120FMC				
	31	Screw	FBT40P080FZK				
	32	Screw	IBZ30P060FCC				
	33	Screw	IBZ30P080FCC				
	34	Screw	IBZ30P150FCC				
	35	Screw	PDZ30P060FCC				

- * The stopper consist of the big ring part and the small ring part.
If you stick the stopper to the leg, stick the big ring part to the front leg, and the small ring part to the rear leg.



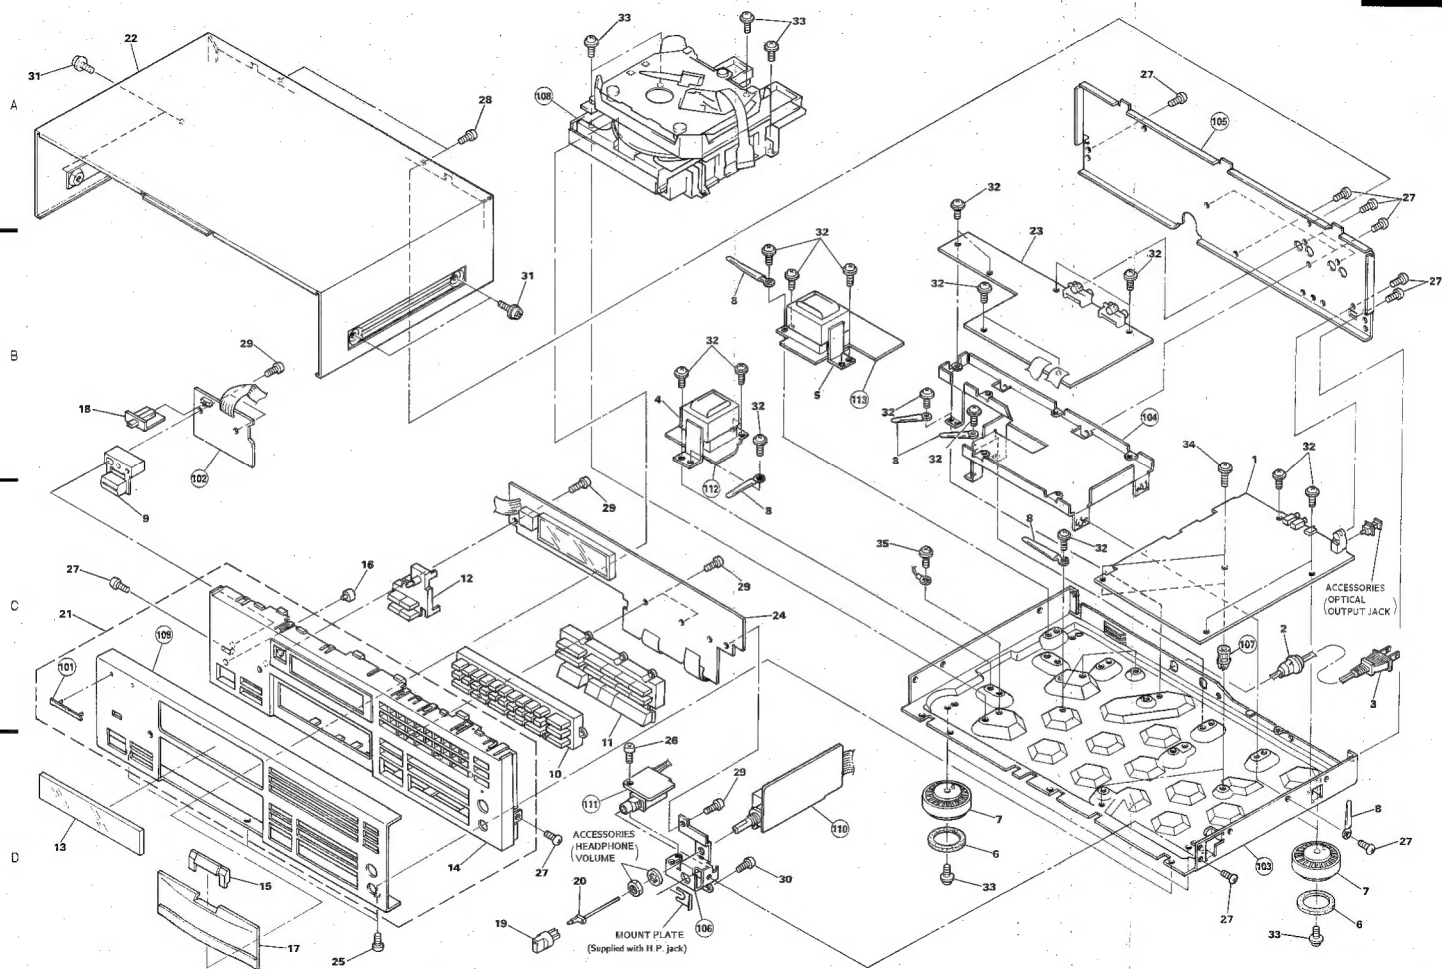

2.2 MECHANISM SECTION

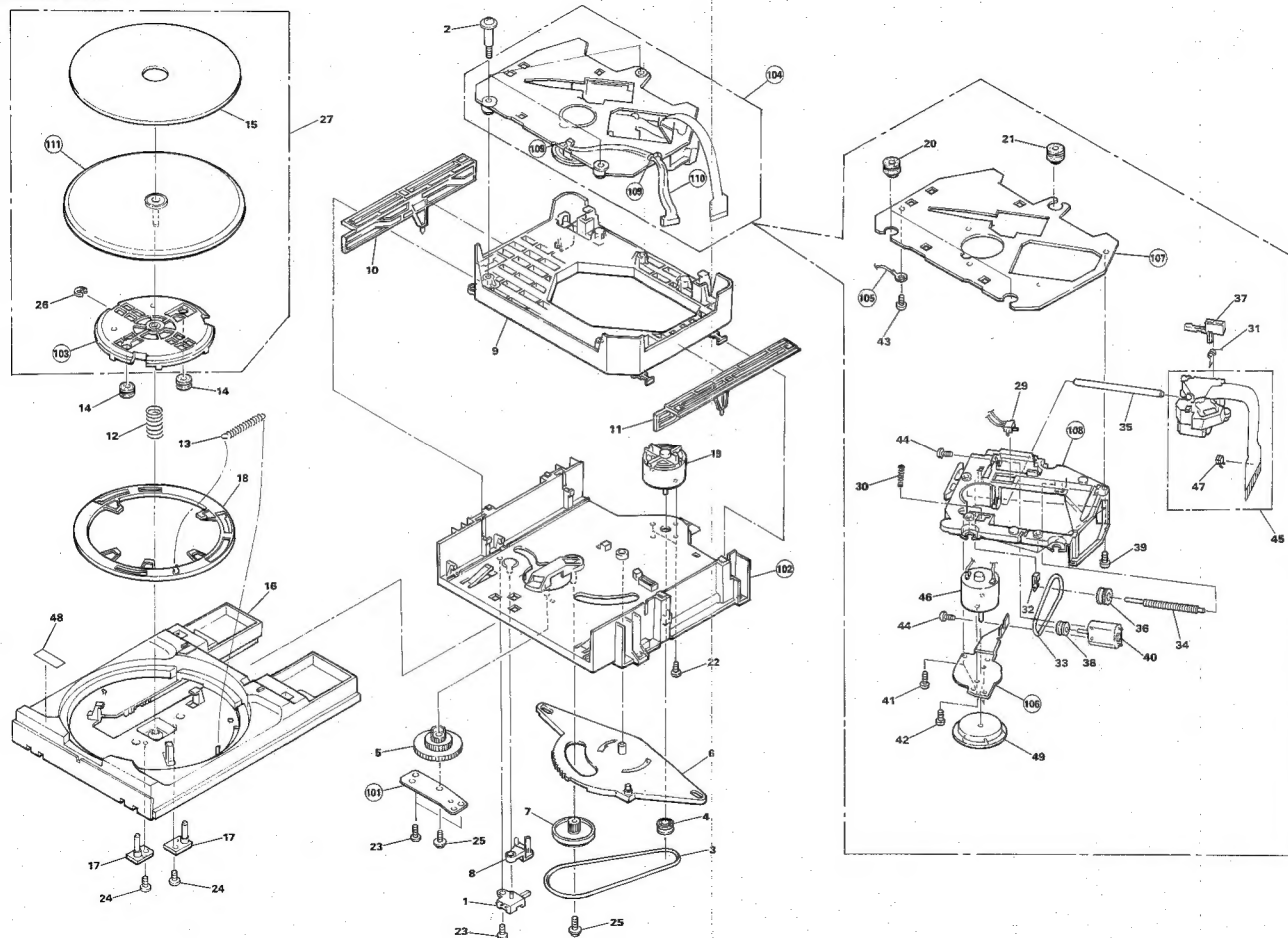

A

B

C


D

Parts List of Mechanism section

Mark	No.	Description	Parts No.	Mark	No.	Description	Parts No.
	1	Lever switch	DSK1003		101	Shaft holder	
	2	Screw(steel)	PBA1027		102	Loading base	
	3	Rubber belt	PEB1186		103	Table bearings assembly	
	4	Motor pulley	PNW1634		104	Servo mechanism assembly	
	5	Drive gear	PNW1996		105	Earth lead unit(300V)	
	6	Timing lever	PNW1997		106	Motor base	
	7	Gear pulley	PNW1998		107	Mechanism base	
	8	SW head	PNW1999		108	Mechanism chassis	
	9	Float base	PNW2000		109	Clamper	
	10	Left cam	PNW2001		110	Connector assembly	
	11	Right cam	PNW2002		111	Turn table(AL)	
	12	Compression spring	PBB1120				
	13	Tention spring	PBH1121				
	14	Float(rubber)	PEB1014				
	15	Table rubber sheet	PEB1161				
	16	Trey	PNW2003				
	17	Table guide	PNW2004				
	18	Lock plate	PNW2005				
	19	DC motor(0.75W)	FXM1010				
	20	Rubber bush	PEB1031				
	21	Rubber bush	PEB1170				
	22	Screw	BMZ36P040FMC				
	23	Screw	BPZ26P060FMC				
	24	Screw	BPZ26P060FMC				
	25	Screw	IPZ20P080FMC				
	26	Stop ring	YE20S				
	27	Turn table assembly	PEA1165				
	29	Push switch	DSG1014				
	30	Spring	PBH1009				
	31	Spring	PBH1084				
	32	Plate spring	PBK1057				
	33	Belt(square)	PEB1072				
	34	Screw	PLA1003				
	35	Guide bar	PLA1071				
	36	Pulley	PNW1066				
	37	Half nut	PNW1605				
	38	Motor pulley	PNW1634				
	39	Screw	PBZ30P080FMC				
	40	DC motor(1.7W)	FXM1013				
	41	Screw	BPZ20P080FZK				
	42	Screw	JFZ20P025FMC				
	43	Screw	PBZ30P060FMC				
	44	Screw	PMZ20P030FMC				
	45	Pick up assembly	PEA1030				
	46	DC motor assembly (With oil)	PEA1156				
	47	Semi-fixed VR(3.3K)	PCP1008				
	48	Caution label	PRW1244				
	49	Disc table	PNW1067				

• How to install the disc table

- 1 Use nippers or other tool to cut the two sections marked ② in figure 1. Then remove the spacer.
- 2 While supporting the spindle motor shaft with the stopper, put spacer on top of the motor base (angled so it doesn't touch section ③), and stick the disc table on top (takes about 9kg pressure). Take off the spacer.



2.3 REMOVE THE TRAY PANEL AND THE TRAY LENS

Hold the tray panel with your hands as the figure shown right, and grasp the tray with your thumbs and then lift the tray panel up while pulling it toward you with the other fingers. (Figs. 1 and 2)




Fig. 1




Fig. 2

2.4 INSTALL THE TRAY PANEL AND THE TRAY LENS

Align the tray panel with the grooves located at both edges of the tray while holding the tray lens with you fingers, and then press it down till it stops. (Fig. 3)

Hold the tray panel and the tray as shown in Fig. 4 and slide them down till you hear a click sound while pressing strongly with your thumbs. (Figs. 4 and 5)




Fig. 3




Fig. 4




Fig. 5

3. P.C.B.'s PARTS LIST

NOTES:

- Parts without part number cannot be supplied.
- Parts marked by "⊗" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J = 5%, and K = 10%).

560Ω	56 × 10 ³	561	RD1/4PS561J
47kΩ	47 × 10 ³	473	RD1/4PS473J
0.5Ω	0R5		RD2H0R5K
1Ω	010		RD1P010K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ	562 × 10 ³	5621	RD1/4SR5621F
--------	-----------------------	------	--------------

Mark	No.	Description	Parts No.	Mark	No.	Description	Parts No.
●MOTHER BOARD ASSEMBLY (PWM1448 : PD-31/KU type) (PWM1449 : PD-8700/HEM, HB, SD and PD-8700-S/HEWM types)							
SEMICONDUCTORS							
Δ	IC30	REGULATOR IC	M5298P	C104		ELECTR.CAPACITOR	CEAS101M10
	IC101	PRE AMP IC	CXA1471S	C110		CERAMIC CAPACITOR	CKCYF103Z50
	IC151	SERVO IC	CXA1372S	C151-C153		ELECTR.CAPACITOR	CEAS101M10
Δ	IC201, IC202	POWER OP-AMP, IC	LA6520	C155		CERAMIC CAPACITOR	CKCYB182K50
	IC301	EFM DEMODULATION IC	CXD2500AQ	C156		CERAMIC CAPACITOR	CGCYB333K25
	Q101	TRANSISTOR	2SA854S	C157		CERAMIC CAPACITOR	CGCYX103K25
	Q321, Q351	TRANSISTOR	DTC124ES	C158, C159		CERAMIC CAPACITOR	CGCYX104K25
	Q391	TRANSISTOR	2SC1740S	C160		ELECTR.CAPACITOR	CEAS47M50
	Q406	TRANSISTOR	DTA124ES	C161		CERAMIC CAPACITOR	CGCYX104K25
				C162		ELECTR.CAPACITOR	CEAS010M50
Δ	D11-D14, D52	DIODE	11ES2	C163		CERAMIC CAPACITOR	CGCYX104K25
	D84	ZENNER DIODE	MTZJ18B	C164		CERAMIC CAPACITOR	CGCYX103K25
	D301	DIODE	1SS254	C167		CERAMIC CAPACITOR	CKCYF103Z50
	D391-D394	DIODE (PWM1448 only)	1SS254	C168		CERAMIC CAPACITOR	CGCYX333K25
	D395-D397	DIODE	1SS254	C169		CERAMIC CAPACITOR	CGCYX103K25
COILS				C170		CERAMIC CAPACITOR	CKCYB332K50
	L391, L392	AXIAL INDUCTOR	LAUR22K	C171, C172		CERAMIC CAPACITOR	CKCYB472K50
	L393, L394	AXIAL INDUCTOR	LAU010K	C202, C207		CERAMIC CAPACITOR	CKCYF103Z50
CAPACITORS				C212		CERAMIC CAPACITOR	CKCYB272K50
	C11, C13	CERAMIC CAPACITOR	CKCYF103Z50	C216, C217		ELECTR.CAPACITOR	CEAS30M16
	C15, C16	CERAMIC CAPACITOR	CKCYF103Z50	C301		CERAMIC CAPACITOR	CGCYX104K25
	C25	ELECTR. CAPACITOR	CEAS332M16	C302		ELECTROLYTIC CAPACIT	CEAS471M6R3
	C26	ELECTR. CAPACITOR	CEAS222M16	C306		CERAMIC CAPACITOR	CKCYB152K50
	C27	ELECTROLYTIC CAPACIT	CEAS471M6R3	C307		CERAMIC CAPACITOR	CGCYX473K25
				C308		CERAMIC CAPACITOR	CGCYX103K25
	C28	ELECTR. CAPACITOR	CEAS101M10	C309		ELECTR.CAPACITOR	CEAS47M50
	C52	ELECTR. CAPACITOR	CEAS101M35	C310		CERAMIC CAPACITOR	CKCYF103Z50
	C60	ELECTR. CAPACITOR	CEAS010M50	C321		CERAMIC CAPACITOR	CGCYX104K25
	C101, C102	ELECTR. CAPACITOR	CEAS101M10	C324		CERAMIC CAPACITOR	CKCYF103Z50
	C103	CERAMIC CAPACITOR	CCCCB200J50	C361		CERAMIC CAPACITOR	CKCYF103Z50
				C362		CERAMIC CAPACITOR	CKCYB102K50
				C397		CERAMIC CAPACITOR	CKCYF103Z50
				RESISTORS			
				VR102	VR		VRTB6VS223
				VR103	VR		VRTB6VS102
				VR151, VR152	VR		VRTB6VS223
				Other resistors			RD1/6PM□□□□

Mark No.	Description	Parts No.
OTHERS		
CN101	CONNECTOR	52045-1610
CN404	CONNECTOR(7P)	KPC7
JA301	OPTICAL OUTPUT JACK	TOTX178
JA391, JA392	JACK/12V	PKN1004
		(PWM1448 only)
JA393	JACK	PKN1005

●OPERATE BOARD ASSEMBLY (PWZ2112)

SEMICONDUCTORS

IC701	MICROCOMPUTER, IC	PD4329A
Q801, Q802	TRANSISTOR	2SD2144S
Q803, Q804	TRANSISTOR	2SB1296
Q805, Q806	TRANSISTOR	2SD2144S
Q807, Q808	TRANSISTOR	DTA124ES
Q810	TRANSISTOR	DTC124ES
D701-D714	DIODE	1SS264

SWITCHES

S701-S742	SWITCH	PSG1006
1-20, PGM, DELETE, CHECK, CLEAR, >20, RESERVE, REPEAT, TIME, RND, PEAK SEARCH, O/L, HI LITE SCAN, AUTO SPACE, COMPU, TIME FADE, ♪, ♫, ♬, ♯, STOP(□), PLAY(>)		

CAPACITORS

C701	ELECTR. CAPACITOR	CEAS330M16
C702-C714	AXIAL CAPACITOR	CKCPLYB221K30

RESISTORS

All resistors	RD1/6PM□□□□
---------------	-------------

OTHERS

	PHOTO SENSOR UNIT	GP1U50X
V701	FL INDICATOR TUBE	PEL1057
X701	CERAMIC RESONATOR	VSS1014

SW BOARD ASSEMBLY

SEMICONDUCTORS

D715	LED	PCX1018
------	-----	---------

SWITCHES

S743-S748	SWITCH	PSG1006
ON/STN BY, FADE IN(↗), FADE OUT(↘), ←, →, DISPLAY OFF		

S749		RSH1017
------	--	---------

RESISTORS

R710	CARBON FILM RESISTOR	RD1/6PM103J
------	----------------------	-------------

HEADPHONE BOARD ASSEMBLY

SEMICONDUCTORS

IC501	OP-AMP, IC	M5218AL
-------	------------	---------

Mark No.	Description	Parts No.
CAPACITORS		
C503, C504	CERAMIC CAPACITOR	CKCYF103Z50
RESISTORS		
VR501	VARIABLE RESISTOR WITH MOTOR 20KB	PCS1006
Other resistors		RD1/6PM□□□□

JACK BOARD ASSEMBLY

COILS

L501-L503	AXIAL INDUCTOR	LAU010K
-----------	----------------	---------

CAPACITORS

C505-C507	CERAMIC CAPACITOR	CKCYF103Z50
-----------	-------------------	-------------

OTHERS

JA501	JACK	PKN1001
-------	------	---------

●AUDIO BOARD ASSEMBLY (PWZ2118)

SEMICONDUCTORS

IC801, IC802	D/A CONVERTER, IC	PD2026A
IC803	LOGIC IC	TC74HCU04AP
IC808, IC809	OP-AMP IC	NJM5532DD
IC901	REGULATOR IC	NJM78L12A
IC902	REGULATOR IC	NJM79L12A
IC903	REGULATOR IC	NJM7805FA

D802-D804, D806	DIODE	1SS264
D801, D808	DIODE	11ES2

CAPACITORS

C801, C802	CERAMIC CAPACITOR	CCOCH120J50
C805, C807	AUDIO FILM CAPACITOR	CFTXA104J50
C809, C811	AUDIO FILM CAPACITOR	CFTXA104J50
C812, C813	CERAMIC CAPACITOR	CCOCH390J50
C819, C820	CERAMIC CAPACITOR	CCOCH390J50

C821	AUDIO FILM CAPACITOR	CFTXA681J50
C822	AUDIO FILM CAPACITOR	CFTXA562J50
C824	ELECTR. CAPACITOR	CEAS470M50
C825	PL. STYRENE CAPACITOR	CQSA102J50
C826, C830	AUDIO FILM CAPACITOR	CFTXA104J50

C832, C834	AUDIO FILM CAPACITOR	CFTXA104J50
C835, C836	CERAMIC CAPACITOR	CCOCH390J50
C839, C840	CERAMIC CAPACITOR	CCOCH390J50
C841	AUDIO FILM CAPACITOR	CFTXA562J50
C842	AUDIO FILM CAPACITOR	CFTXA681J50

C843	ELECTR. CAPACITOR	CEAS470M50
C844-C846	PL. STYRENE CAPACITOR	CQSA102J50
C860, C861	ELECTR. CAPACITOR	CEAS330M16
C863, C864	CERAMIC CAPACITOR	CKCYF103Z50
C870	ELECTROLYTIC CAPACIT	CEAS471M6R3

C901, C902	ELECTR. CAPACITOR	CEAS102M25
C903, C904	ELECTR. CAPACITOR	CEAS471M16
C905	ELECTR. CAPACITOR	CEAS332M16
C906	ELECTR. CAPACITOR	CEAS102M16
C914-C919	CERAMIC CAPACITOR	CKCYF103Z50

Mark	No.	Description	Parts No.
------	-----	-------------	-----------

RESISTORS

All resistors

RD1/6PM□□□□

OTHERS

CN801 CONNECTOR(8P)

KPC9

JA801 JACK

PKB1010

JA802 JACK

PKB1010

X801 XTAL RES (OSC)

PSS1006

S. TRANS BOARD ASSEMBLY



No electrical parts are supplied this assembly.

A. TRANS BOARD ASSEMBLY


No electrical parts are supplied this assembly.

4. PACKING


Mark	No.	Description	Parts No.
1		
2		Cord with plug(mini plug)	PDE-319
3		Cord with plug	PDE1001
4		Operating instructions (English)	PRB1151
5		Remote control unit (CU-PD053)	PWW1069
6		Battery lid	PZN1001
7		Styrol protector F	PHA1163
8		Styrol protector R	PHA1164
9		CD Packing case	PHG1679
10		
11		Sheet	Z23-007
101		Mangan battery(R03, AAA)	

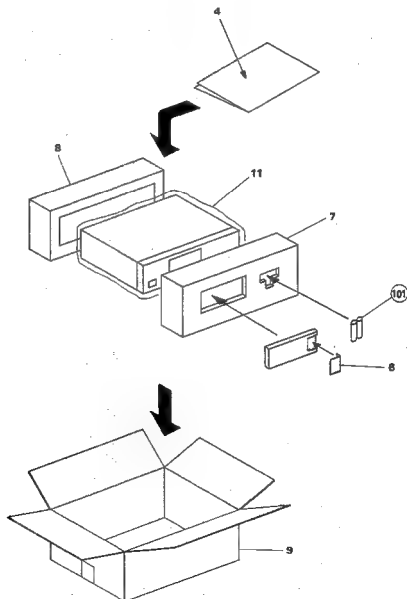






MC5298P
IC20

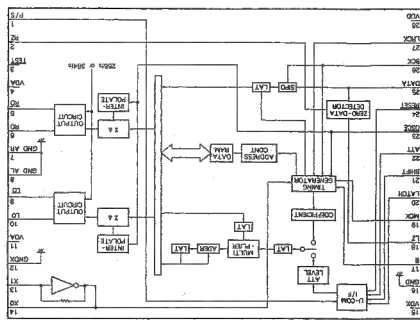

PD2026A
IC401





5. SCHEMATIC DIAGRAM AND P.C.BOARDS CONNECTION DIAGRAM




5.1 Wave Forms

Note: The encircled numbers denote measuring in the schematic diagram.


*1 50T-JUMP: After switching to the pause mode, press the manual search key.

*2 FOCUS-IN: Press the key without loading a disc.

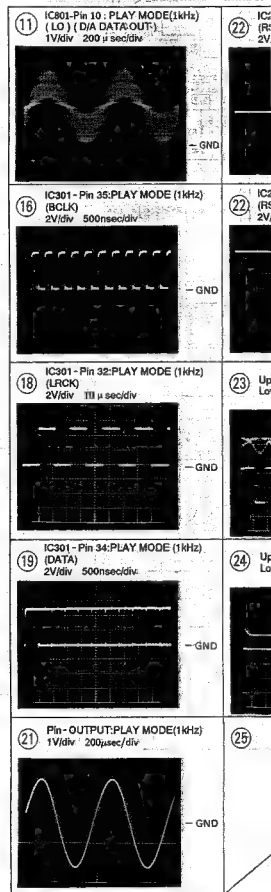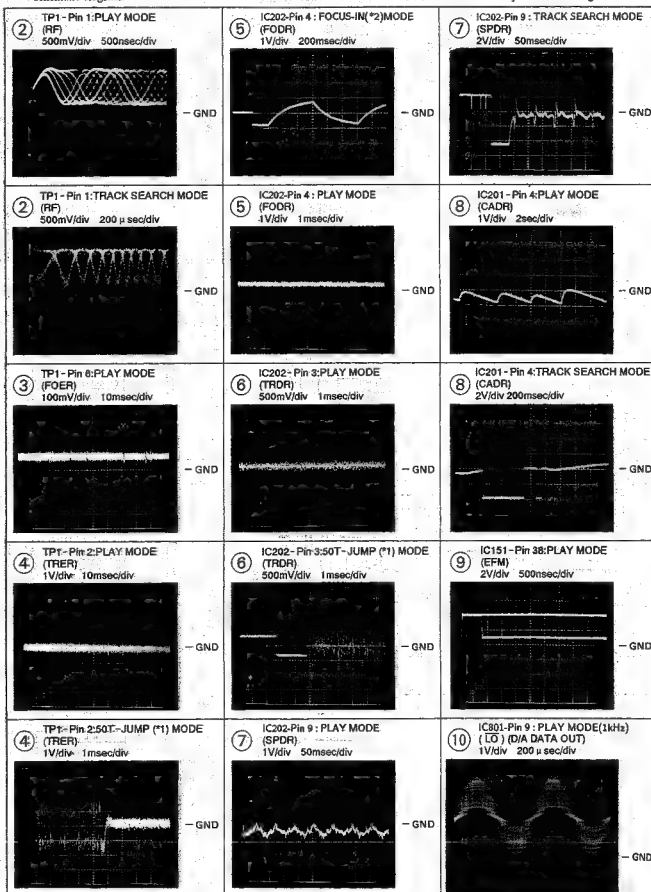

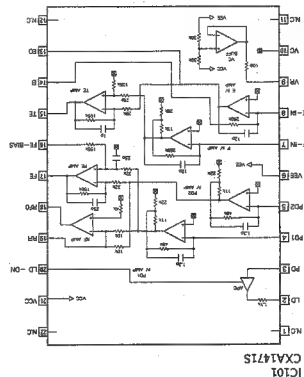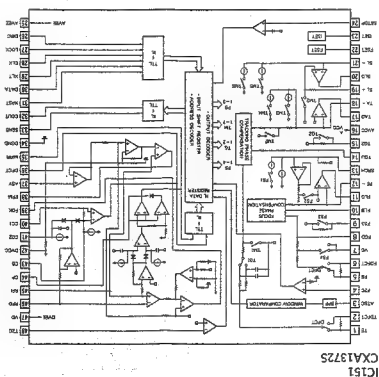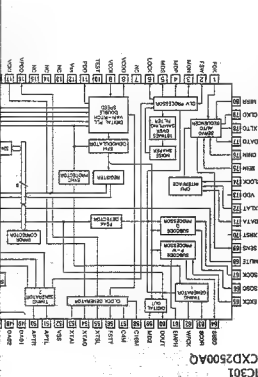

● IC BLOCK DIAGRAM

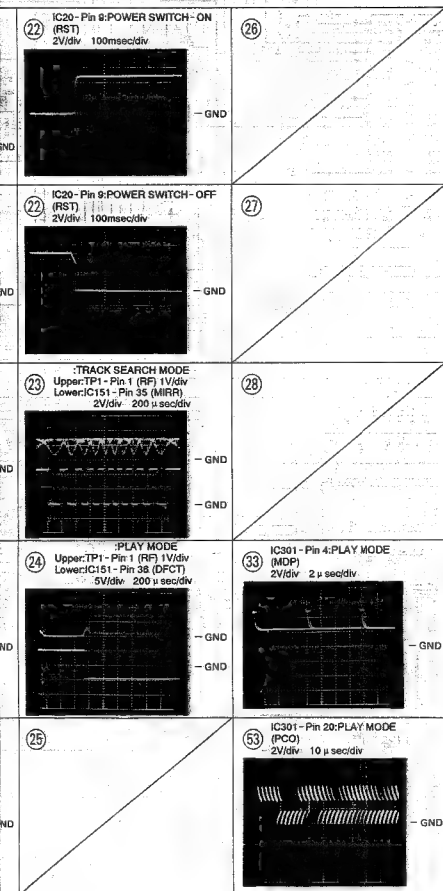

- RESISTORS:**
Indicated in R , $1/4W$, $1/8W$ and $1/8W$, $\pm 5\%$ tolerance unless otherwise noted
k; $\pm 2M$; $M\Omega$ (F); $\pm 1\%$ (G); $\pm 5\%$ (K); $\pm 10\%$ (M); $\pm 20\%$ tolerance.
- CAPACITORS:**
Indicated in capacity (μF)/voltage (V) unless otherwise noted p; pF. Indication without voltage is 50V except electrolytic capacitor.
- VOLTAGE, CURRENT:**
 - \square : DC voltage (V) at play state.
 - \square : DC current at play state.
 - Value in () is DC current at stop state.
- OTHERS:**
 - \rightarrow : Signal route.
 - \odot : Adjusting point

The Δ mark found on some component parts indicates the importance of the safety factor of the parts. Therefore, when replacing, be sure to use parts of identical designation.

R marked capacitors and resistors have parts numbers.

This is the basic schematic diagram, but the actual circuit may vary due to improvements in design.
- SWITCHES:** (The underlined indicates the switch position)
 SWITCH BOARD ASSEMBLY
 S743: POWER ON-OFF
 OPERATE BOARD ASSEMBLY
 S725: >30
 S726: RESERVE
 S727: REPEAT
 S728: TIME
 S729: RND
 S730: PEAK SEARCH
 S731: O/L
 S732: HI LITE SCAN
 S733: AUTO SPACE
 S734: COMPU
 S735: TIME FADE
 S736: \square MANUAL SEARCH
 S737: IN
 S738: \square TRACK SEARCH
 S739: IN
 S740: STOP
 S741: PAUSE
 S742: PLAY
 S743: ON/STN BY
 S744: FADE IN
 S745: FADE OUT
 S747: INDEX
 S748: DISPLAY OFF

Line Voltage Selection (For HB, HEM and HEWM types)




Line voltage can be changed with the following steps.

- Disconnect the AC power cord.
- Remove the top cover.
- Change the position of the jumper wire A as follows


Voltage	Jumper wire A position
230V	a
240V	b

- Stick the line voltage label on the rear panel.


Parts No.	Description
AXX-193	220V label
AXX-192	240V label

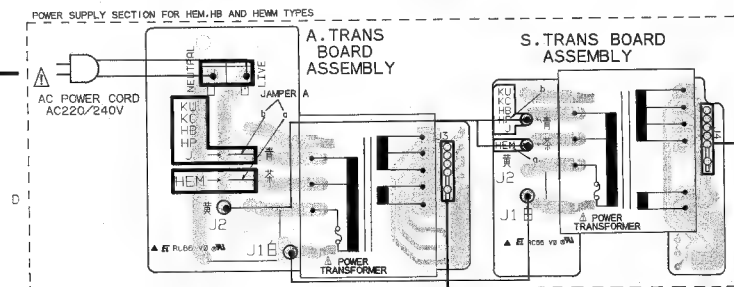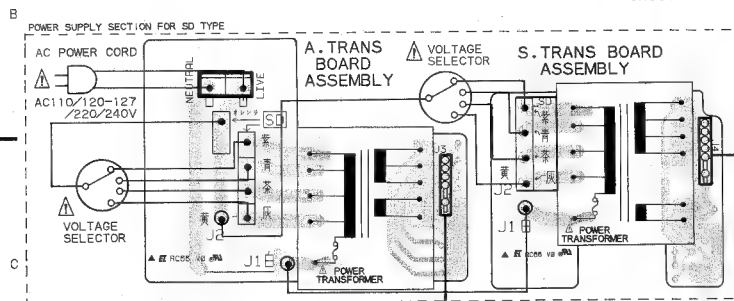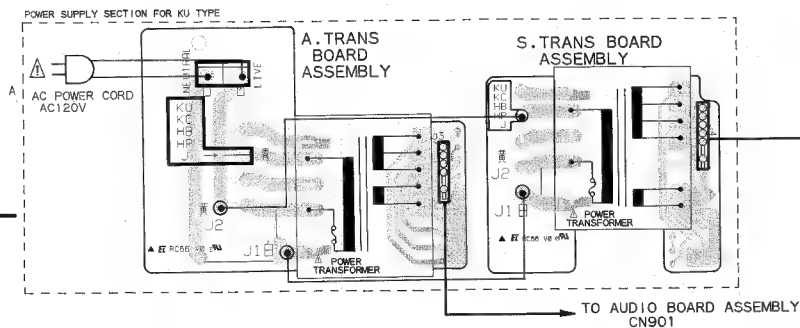

MOTHER BOARD ASSEMBLY
(PWM1448:KU TYPE)
(PWM1449:HEM,HB,SD AND HEWM TYPES)

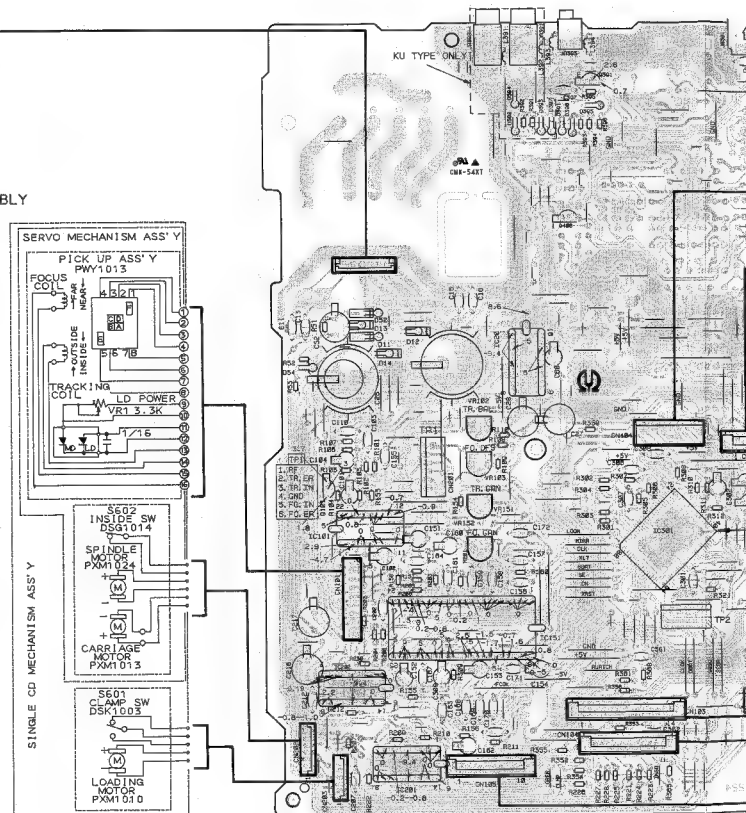

TYPES)

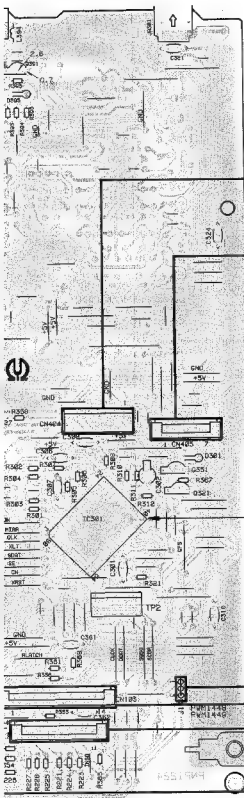

TO AUDIO BOARD
ASSEMBLY
J801


TO AUDIO BOARD
ASSEMBLY
J802

TO HEADPHONE BOARD ASSEMBLY
CN501

IC201
(C32020049)

Pin	Volts	Pin	Volts
1	S	41	R.C.
2	R.C.	42	S
3	S	43	R.C.
4	2.5	44	R.C.
5	R.C.	45	R.C.
6	S	46	4.4
7	R.C.	47	S
8	R.C.	48	S
9	0	49	0-0.3
10	0	50	R.C.
11	R.C.	51	R.C.
12	0	52	0
13	R.C.	53	2.5
14	R.C.	54	R.C.
15	R.C.	55	S
16	R.C.	56	R.C.
17	S	57	R.C.
18	2.5	58	R.C.
19	2.4	59	S
20	2.4	60	A
21	0	61	R.C.
22	2.5	62	R.C.
23	0	63	R.C.
24	5.5	64	R.C.
25	R.C.	65	S
26	0	66	3.3-4.6
27	2.5	67	S
28	R.C.	68	0
29	0	69	5.1-9
30	R.C.	70	S
31	1.3-2.2	71	S
32	7.5	72	S
33	0	73	S
34	2.5	74	S
35	R.C.	75	S
36	R.C.	76	S
37	R.C.	77	S
38	R.C.	78	S
39	R.C.	79	S
40	R.C.	80	S


SW BOARD ASSEMBLY



IC201
(C32020049)

Pin	Volts	Pin	Volts
1	5.6	33	5.0
2	2.4-3.5	34	5.2-4.1
3	2.4-3.5	35	5.0
4	2.4-3.5	36	0
5	2.4-3.5	37	5.0
6	2.4-3.5	38	5.0
7	2.4-3.5	39	0
8	2.4-3.5	40	0
9	2.4-3.5	41	0
10	2.4-3.5	42	0
11	2.4-3.5	43	5.0
12	0	44	5.0
13	0	45	5.0
14	0	46	5.0
15	4.8	47	5.0
16	15.2-12.8	48	5.1-3
17	1.4	49	5.0
18	20.0	50	5.0
19	5.6	51	0
20	11.6-11.6	52	5.0
21	1.4	53	5.0
22	15.5-15.5	54	5.0
23	3.4-3.4	55	5.0
24	4.0-2.0	56	5.0
25	4.8-3.8	57	5.0
26	5.0	58	0
27	1.5	59	0
28	1.2-1.3	60	5.0
29	15.5-15.5	61	0
30	1.5	62	0
31	5.6	63	0
32	5.6	64	0

OPERATE BOARD ASSEMBLY(PWZ2112)

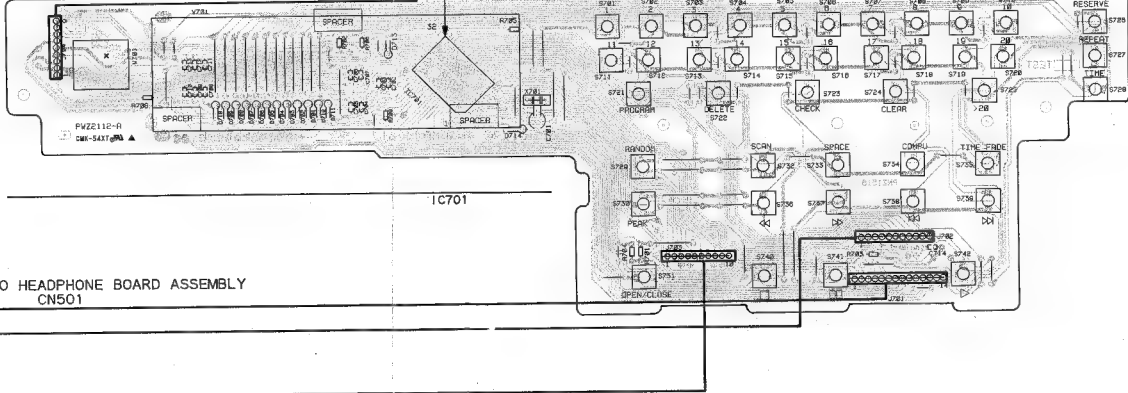

P.C.B. pattern diagram indicator	Corresponding part symbol	Part name	P.C.B. pattern diagram indicator	Corresponding part symbol	Part name
		Translator			Ceramic capacitor
		RET			Mylar capacitor
		Diode			Electrolytic capacitor (non polarized)
		Zener diode			Electrolytic capacitor (polarized)
		LED			Power capacitor
		Varactor			Semi-conductor
		Test switch			Resistor array
		Inductor			Resistor
		Coil			Resonator
		Transformer			Thermistor
		Filter			


1. This P.C.B. connection diagram is viewed from the parts mounted side.
2. The parts which have been mounted on the board can be replaced with those shown with the corresponding wiring symbols listed in the above table.
3. The capacitor terminal marked with shows negative terminal.
4. The diode marked with shows cathode side.
5. The transistor terminal marked with shows emitter.

A

B

C

D

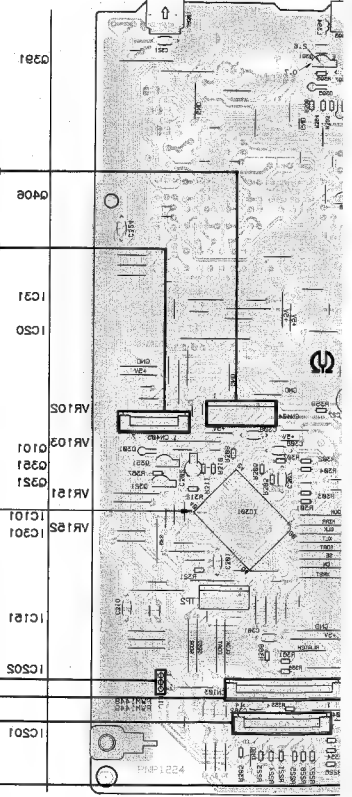

This P.C.B. connection diagram is viewed from the foil side.

AUDIO BOARD ASSEMBLY (PW52118)

TO
S. TRANS
ASSEMBLY
13

TO MOTHER BOARD ASSEMBLY
CN404

IC905
IC901
0803 0802 1C801
0803 0801 1C808 0810 1C803
1C803 0805 0806 0808


TO MOTHER BOARD ASSEMBLY
CN405

HEADPHONE BOARD ASSEMBLY

JACK BOARD
ASSEMBLY

IC901

AUDIO BOARD ASSEMBLY (PWZ2118)

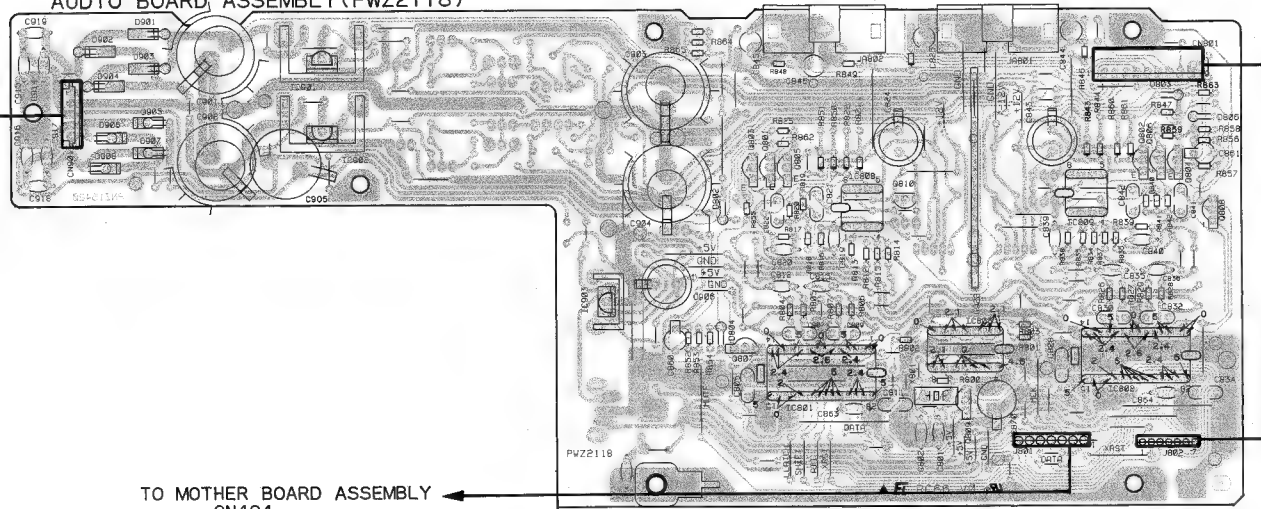

TO MOTHER BOARD ASSEMBLY
CN404

IC901
IC902

IC903


Q803 Q801 IC808 Q810
Q807 Q805 IC801

IC803
Q809


IC809 Q802 Q806 Q808
IC802 Q804

TO MOTHER BOARD ASSEMBLY
CN405

JACK BOARD ASSEMBLY



HEADPHONE BOARD ASSEMBLY

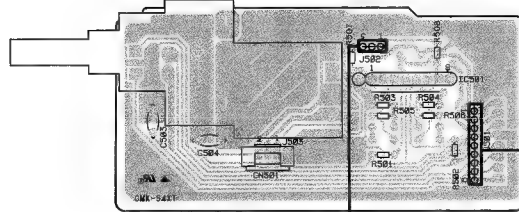

IC501

PWZ2118



6. ADJUSTMENTS

6.1 ADJUSTMENT METHODS

If a disc player is adjusted incorrectly or inadequately, it may malfunction or not work at all even though there is nothing at all wrong with the pickup or the circuitry. Adjust correctly following the adjustment procedure.

● Adjustment items/verification items and order

Step	Item	Test point	Adjustment location
1	Focus offset adjustment	TP1, Pin 6(FCS. ERR)	VR103(FCS. OFS)
2	Grating adjustment	TP1, Pin 2(TRK. ERR)	Grating adjustment slit
3	Tracking error balance adjustment	TP1, Pin 2(TRK. ERR)	VR102(TRK. BAL.)
4	Pickup radial/tangential direction tilt adjustment	TP1, Pin 1(RF)	Radial tilt adjustment screw, Tangential tilt adjustment screw
5	RF level adjustment	TP1, Pin 1(RF)	VR1(RF level)
6	Focus servo loop gain adjustment	TP1, Pin 5(FCS. IN) TP1, Pin 6(FCS. ERR)	VR152(FCS. GAN)
7	Tracking servo loop gain adjustment	TP1, Pin 3(TRK. IN) TP1, Pin 2(TRK. ERR)	VR151(TRK. GAN)
8	Focus error signal verification	TP1, Pin 6(FCS. ERR)	_____

● Abbreviation table

FCS. ERR :Focus Error
 FCS. OFS :Focus Offset
 TRK. ERR :Tracking Error
 TRK. BAL :Tracking Balance
 FCS. GAN :Focus Gain
 TRK. GAN :Tracking Gain
 FCS. IN :Focus In
 TRK. IN :Tracking In

● Measuring Instruments and tools

1. Dual trace oscilloscope (10:1 probe)
2. Low-frequency oscillator
3. Test disc (YEDS-7)
4. 12-cm disc (with at least about 70 minutes recording)
5. Low-pass filter (39 k Ω + 0.001 μ F)
6. Resistor (100 k Ω)
7. Hexagonal wrench (M3 mm)
8. Standard tools

● Test point and adjustment variable resistor positions

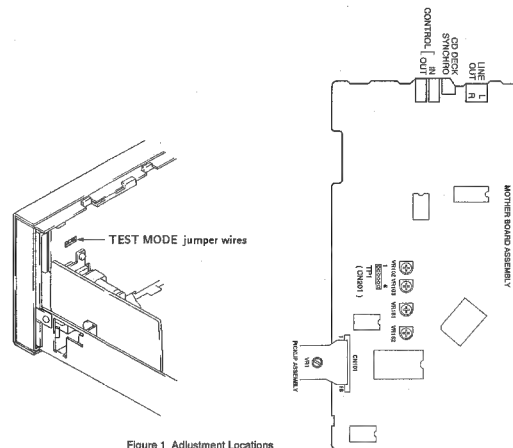


Figure 1 Adjustment Locations

● Notes

1. Use a 10:1 probe for the oscilloscope.
2. All the knob positions (settings) for the oscilloscope in the adjustment procedures are for when a 10:1 probe is used.

● Test mode

These models have a test mode so that the adjustments and checks required for service can be carried out easily. When these models are in test mode, the keys on the front panel work differently from normal. Adjustments and checks can be carried out by operating these keys with the correct procedure. For these models, all adjustments are carried out in test mode.

[Setting these models to test mode]

How to set this model into test mode.

1. Unplug the power cord from the AC socket.
2. Short the test mode jumper wires. (See Figure 1.)
3. Plug the power cord back into the AC socket.

When the test mode is set correctly, the display is different from what it usually is when the power is turned on. If the display is still the same as usual, test mode has not been set correctly, so repeat Steps 1 - 3.

[Release from test mode]

Here is the procedure for releasing the test mode:

1. Press the STOP key and stop all operations.
2. Unplug the power cord from the AC socket.

[Operations of the keys in test mode]

Code	Key name	Function in test mode	Explanation
	PROGRAM	Focus servo close	<p>The laser diode is lit up and the focus actuator is lowered, then raised slowly and the focus servo is closed at the point where the objective lens is focused on the disc.</p> <p>With the player in this state, if you lightly rotate the stopped disc by hand, you can hear the sound the focus servo.</p> <p>If you can hear this sound, the focus servo is operating correctly. If you press this key with no disc mounted, the laser diode lights up, the focus actuator is pulled down, then the actuator is raised and lowered twice and returned to its original position.</p>
▷	PLAY	Spindle servo ON	<p>Starts the spindle motor in the clockwise direction and when the disc rotation reaches the prescribed speed (about 500 rpm at the inner periphery), sets the spindle servo in a closed loop.</p> <p>Be careful. Pressing this key when there is no disc mounted makes the spindle motor run at the maximum speed.</p> <p>If the focus servo does not go correctly into a closed loop or the laser light shines on the mirror section at the outermost periphery of the disc, the same symptom is occurred.</p>
□□	PAUSE	Tracking servo close/open	<p>Pressing this key when the focus servo and spindle servo are operating correctly in closed loops puts the tracking servo into a closed loop, displays the track number being played back and the elapsed time on the front panel, and outputs the playback signal.</p> <p>If the elapsed time is not displayed or not counted correctly or the audio is not played back correctly, it may be that the laser is shining on the section with no sound recorded at the outer edge of the disc, that something is out of adjustment, or that there is some other problem.</p> <p>This key is a toggle key and open/close the tracking servo alternately. This key has no effect if no disc is mounted.</p>

Code	Key name	Function in test mode	Explanation
◀◀	MANUAL SEARCH REV	Carriage reverse (inwards)	Moves the pickup position toward the inner diameter of the disc. When this key is pressed with the tracking servo in a closed loop, the tracking servo automatically goes into an open loop. Since the motor does not automatically stop at the mechanical end point in test mode, be careful with this operation.
▶▶	MANUAL SEARCH FWD	Carriage forward (outwards)	Moves the pickup position toward the outer diameter of the disc. When this key is pressed with the tracking servo in a closed loop, the tracking servo automatically goes into an open loop. Since the motor does not automatically stop at the mechanical end point in test mode, be careful with this operation.
□	STOP	Stop	Switches off all the servos and initialized. The pickup remains where it was when this key was pressed.
▲	OPEN/CLOSE	Disc tray open/close	Open/close the disc tray. This key is a toggle key and open/close tray alternately. Pressing this key when the disc is turning stops the disc, then opens the tray. This key operation does not affect the position of the pickup.

[How to play back a disc in test mode]

In test mode, since the servos operate independently, playing back a disc requires that you operate the keys in the correct order to close the servos.

Here is the key operation sequence for playing back a disc in test mode.

PROGRAM

Lights up the laser diode and closes the focus servo.



PLAY ▷

Starts the spindle motor and closes the spindle servo.



PAUSE ■

Closes the tracking servo.

Wait at least 2-3 seconds between each of these operations.

1. Focus Offset Adjustment

● Objective	Sets the DC offset for the focus error amp.		
● Symptom when out of adjustment	The model does not focus in and the RF signal is dirty.		
● Measurement instrument connections	Connect the oscilloscope to TP1, Pin 6 (FCS. ERR)	● Player state	Test mode, stopped (just the Power switch on)
	[Settings] 5 mV/division 10 ms/division DC mode	● Adjustment location	VR103 (FCS. OFS)
		● Disc	None needed

[Procedure]

Adjust VR103 (FCS. OFS) so that the DC voltage at TP1, Pin 6 (FCS. ERR) is -150 ± 50 mV.

2. Grating Adjustment

● Objective	To align the tracking error generation laser beam spots to the optimum angle on the track.		
● Symptom when out of adjustment	Play does not start, track search is impossible, tracks are skipped.		
● Measurement instrument connections	Connect the oscilloscope to TP1, Pin 2 (TRK. ERR) via a low pass filter. (See Figure 2)	● Player state	Test mode, focus and spindle servos closed and tracking servo open
	[Settings] 50 mV/division 5 ms/division DC mode	● Adjustment location	Pickup grating adjustment slit
		● Disc	12-cm disc. (YEDS-7 can not be used.)

[Procedure]

1. Move the pickup to the outer edge of the disc with the MANUAL SEARCH FWD \triangleright or REV \triangleleft key.
2. Press the PROGRAM key, then the PLAY \triangleright key in that order to close the focus servo then the spindle servo.
3. Insert an ordinary screwdriver into the grating adjustment slit and adjust the grating to find the null point. For more details, see the next page.
4. If you slowly turn the screwdriver clockwise from the null point, the amplitude of the wave gradually increases, then if you continue turning the screwdriver, the amplitude of the wave becomes smaller again. Turn the screwdriver clockwise from the null point and set the grating to the first point where the wave amplitude reaches its maximum.

Reference : Figure 3 shows the relation between the angle of the tracking beam with the track and the waveform.

Note : The amplitude of the tracking error signal is about 3 Vp-p (when a $39\text{ k}\Omega + 0.001\text{ }\mu\text{F}$ low pass filter is used). If this amplitude is extremely small (2 Vp-p or less), the objective lens or the pickup malfunction may be the cause. If the difference between the amplitude of the error signal at the innermost edge and outermost edge of the disc is more than 10%, the grating is not adjusted to the optimum point, so adjust it again.

5. Return the pickup to more or less midway across the disc with the MANUAL SEARCH REV \triangleleft key, press the PAUSE \square key and double check that the track number and elapsed time are displayed on the front panel. If they are not displayed at this time or the elapsed time changes irregularly, double check the null point and adjust the grating again.





Figure 2



[How to find the null point]

When you insert the regular screwdriver into the slit for the grating adjustment and change the grating angle, the amplitude of the tracking error signal at TP1, Pin 2 changes. Within the range for the grating, there are five or six locations where the amplitude of the wave reaches a minimum. Of these five or six locations, there is only one at which the envelope of the waveform is smooth. This location is where the three laser beams divided by the grating are all right above the same track. (See Figure 3.)

This point is called the null point. When adjusting the grating, this null point is found and used as the reference position.


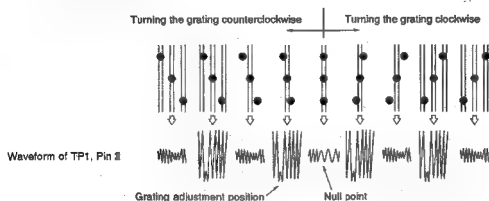


Figure 3

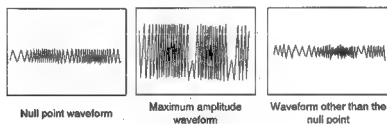


3. Tracking Error Balance Adjustment

● Objective	To correct for the variation in the sensitivity of the tracking photodiode.		
● Symptom when out of adjustment	Play does not start or track search is impossible.		
● Measurement instrument connections	Connect the oscilloscope to TP1, Pin 2 (TRK. ERR). This connection may be via a low pass filter.	● Player state	Test mode, focus and spindle servos closed and tracking servo open
	[Settings] 50 mV/division 5 ms/division DC mode	● Adjustment location	VR102 (TRK. BAL)
		● Disc	YEDS-7

[Procedure]

1. Move the pickup to midway across the disc (R=35 mm) with the MANUAL SEARCH FWD $\triangleright\triangleright$ or REV $\triangleleft\triangleleft$ key.
2. Press the PROGRAM key, then the PLAY \triangleright key in that order to close the focus servo then the spindle servo.
3. Line up the bright line (ground) at the center of the oscilloscope screen and put the oscilloscope into DC mode.
4. Adjust: VR102 (TRK. BAL) so that the positive amplitude and negative amplitude of the tracking error signal at TP1, Pin 2 (TRK. ERR) are the same (in other words, so that there is no DC component).




4. Pickup Radial/Tangential Tilt Adjustment

● Objective	To adjust the angle of the pickup relative to the disc so that the laser beams are shone straight down into the disc for the best read out of the RF signals.		
● Symptom when out of adjustment	Sound broken; some discs can be played but not others.		
● Measurement instrument connections	Connect the oscilloscope to TPI, Pin 1 (RF). [Settings] 20 mV/division 200 ns/division AC mode	● Player state ● Adjustment location ● Disc	Test mode, play Pickup radial tilt adjustment screw and tangential tilt adjustment screw 12 - cm disc. (YEDS-7 can not be used.)

[Procedure]

1. Press the MANUAL SEARCH FWD >> or REV << key so that the radial / tangential tilt screws can be adjusted. Press the PROGRAM key, the PLAY > key, then the PAUSE ||| key in that order to close the focus servo then the spindle servo and put the player into play mode.
2. First, adjust the radial tilt adjustment screw with a Phillips screwdriver so that the eye pattern (the diamond shape at the center of the RF signal) can be seen the most clearly.
3. Next, adjust the tangential tilt adjustment screw with a Phillips screwdriver so that the eye pattern (the diamond shape at the center of the RF signal) can be seen the most clearly (Figure 5).
4. Adjust the radial tilt adjustment screw and the tangential tilt adjustment screw again so that the eye pattern can be seen the most clearly. As necessary, adjust the two screws alternately so that the eye pattern can be seen the most clearly.

Note:Radial and tangential mean the directions relative to the disc shown in Figure 4.

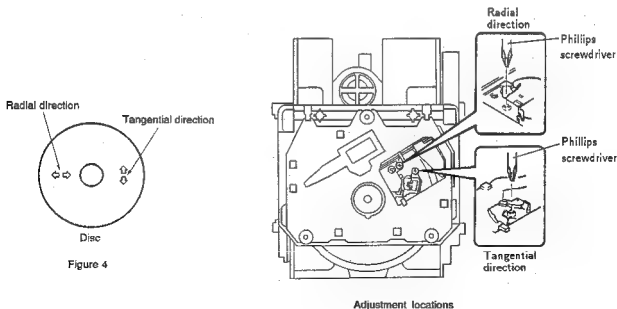

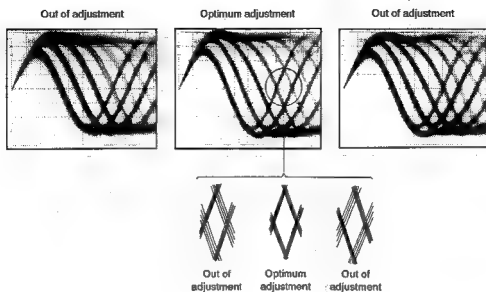


Figure 5 Eye pattern

5. RF Level Adjustment

● Objective	To optimize the playback RF signal amplitude		
● Symptom when out of adjustment	No play or no search		
● Measurement instrument connections	Connect the oscilloscope to TP1, Pin 1 (RF).	● Player state	Test mode, play
	[Settings] 50 mV/division 10 ms/division AC mode	● Adjustment location	VR1(laser power)
		● Disc	YEDS-7

[Procedure]

1. Move the pickup to midway across the disc ($R=35$ mm) with the MANUAL SEARCH FWD $\triangleright\triangleright$ or REV $\triangleleft\triangleleft$ key, then press the PROGRAM key, then the PLAY \triangleright key in that order to close the respective servos and put the player into play mode.
2. Adjust VR1 (laser power) so that the RF signal amplitude is $1.2V_{p-p} \pm 0.1V$.

6. Focus Servo Loop Gain Adjustment

● Objective	To optimize the focus servo loop gain.		
● Symptom when out of adjustment	Playback does not start or focus actuator noisy.		
● Measurement instrument connections	See figure 6. [Settings] CH1 CH2 20 mV/division 5 mV/division X - Y mode	● Player state ● Adjustment location ● Disc	Test mode, play VR152 (FCS. GAN) YEDS-7

[Procedure]

1. Set the AF generator output to 1.2kHz and 1 Vp-p.
2. Press the MANUAL SEARCH FWD \triangleright or REV \triangleleft key to move the pickup to halfway across the disc (R=35 mm), then press the PROGRAM key, the PLAY \triangleright key, then the PAUSE \parallel key in that order to close the corresponding servos and put the player into play mode.
3. Adjust VR152 (FCS. GAN) so that the Lissajous waveform is symmetrical about the X axis and the Y axis.





Figure 6


Focus Gain Adjustment



Higher gain



Optimum gain



Lower gain

7. Tracking Servo Loop Gain Adjustment

● Objective	To optimize the tracking servo loop gain.		
● Symptom when out of adjustment	Playback does not start, during searches the actuator is noisy, or tracks are skipped.		
● Measurement instrument connections	See Figure 7.	● Player state	Test mode, play
	[Settings] CH1 CH2 50 mV/division 50 mV/division X-Y mode	● Adjustment location	VR151 (TRK. GAN)
		● Disc	YEDS-7

[Procedure]

1. Set the AF generator output to 1.2 kHz and 2 V_{p-p}.
2. Press the MANUAL SEARCH FWD ▷ or REV ◁ key to move the pickup to halfway across the disc (R=35 mm), then press the PROGRAM key, the PLAY ▷ key, then the PAUSE ||| key in that order to close the corresponding servos and put the player into play mode.
3. Adjust VR151 (TRK. GAN) so that the Lissajous waveform is symmetrical about the X axis and the Y axis.





Figure 7


Tracking Gain Adjustment



Higher gain



Optimum gain



Lower gain

8. Focus Error Signal (Focus S Curve) Verification

● Objective	To judge whether the pickup is ok or not by observing the focus error signal. The pickup is judged from the amplitude of the tracking error signal (as discussed in the section on adjusting the tracking error balance) and the waveform for the focus error signal.		
● Symptom when out of adjustment			
● Measurement instrument connections	Connect the oscilloscope to TP1, Pin 6 (FCS. ERR).	● Player state	Test mode, stop
	[Settings] 100 mV/division 5 ms/division DC mode	● Adjustment location	None
		● Disc	YEDS-7

[Procedure]

1. Connect TP1 Pin 5 to ground.
2. Mount the disc.
3. While watching the oscilloscope screen, press the PROGRAM key and observe the waveform in Figure 8 for a moment. Verify that the amplitude is at least 2.5 Vp-p and that the positive and negative amplitude are about equal. Since the waveform is only output for a moment when the PROGRAM key is pressed, press this key over and over until you have checked the waveform.




Figure 8


[Judging the pickup]

Do not judge the pickup until all the adjustments have been made correctly. In the following cases, there may be something wrong with the pickup.

1. The tracking error signal amplitude is extremely small (less than 2 Vp-p).
2. The focus error signal amplitude is extremely small (less than 2.5 Vp-p).
3. The positive and negative amplitudes of the focus error signal are extremely asymmetrical (2 : 1 ratio or more).
4. The RF signal is too small (less than 0.8 Vp-p) and even if VR1 (laser power) is adjusted, the RF signal can not be brought up to the standard level.

7. FL INFORMATION

EXTERNAL VIEWS



DISPLAY PATTERN ANODE GRID ASSIGNMENT



ANODE GRID ASSIGNMENT AND PIN ASSIGNMENT

	G1	G2	G3	G4	G5	G6	G7	G8	G9	G10
a	a	a	a	a	a	a	a	/	▶	a
b	b	b	b	b	b	b	b	SCAN		b
c	c	c	c	c	c	c	c	▶ OPEN	54	c
d	d	d	d	d	d	d	d	reserve	46	d
e	e	e	e	e	e	e	e	▶ (single)	60	e
f	f	f	f	f	f	f	f	▶ (scan)	90	f
g	g	g	g	g	g	g	g	SINGLE	74	g
h	/	DISPLAY	OFF	FADER	1 ▶	REPEAT	AUTO SPACE	▶ OFF	TIME FADE	/
i	1	2	4	5	7	8	10	▶ (ALL)	AUTO	/
j	TRACK	3	STEP	6	/	9	PGM	ALL	EDIT	:
k	/	12	INDEX	15	MIN	18	▶	▶ (RND)	PEAK SEARCH	SEC
l	11	13	14	16	17	19	DEL	RND	COMPU	/



PIN ASSIGNMENT

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13
Assignment	F	F	NP	e	f	g	h	a	b	c	d	i	j
Pin No.	14	15	16	17	18	19	20	21	22	23	24	25	26
Assignment	k	l	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	G1
Pin No.	27	28	29	30	31	32	33	34	35	36	37	38	
Assignment	G2	G3	G4	G5	G6	G7	G8	G9	G10	NP	F	F	

F: Filament

G1-G10: Grid

a-l: Anode

NP: No pin

8. FOR PD-8700/HEM, HB, SD AND PD-8700-S/HEWM TYPES

NOTES:

- Parts without part number cannot be supplied.
- Parts marked by "⊗" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

CONTRAST OF MISCELLANEOUS PARTS

The PD-8700/HEM, HB, SD and PD-8700-S/HEWM types are the same as the PD-31/KU type with the exception of the following sections.

Mark	Symbol & Description	Part No.					Remarks
		PD-31/KU	PD-8700/HEM	PD-8700/HB	PD-8700/SD	PD-8700-S/HEWM	
⊗	Mother board assembly	PWM1448	PWM1449	PWM1449	PWM1449	PWM1449	*1
⊗	S trans board assembly	Non supply	Non supply	Non supply	Non supply	Non supply	*2
⊗	A trans board assembly	Non supply	Non supply	Non supply	Non supply	Non supply	*2
⊗	AC power cord	PDG1015	PDG1003	PDG1036	PDG1013	PDG1003	
⊗	Power transformer S(AC120V)	PTT1179					
Δ	Power transformer S(AC220, 240V)		PTT1178	PTT1178		PTT1178	
Δ	Power transformer S (AC110, 120-127, 220, 240V)				PTT1181		
Δ	Power transformer A(AC120V)	PTT1183					
Δ	Power transformer A(AC220, 240V)		PTT1182	PTT1182		PTT1182	
Δ	Power transformer A (AC110, 120-127, 220, 240V)				PTT1185		
Δ	Voltage selector				PSB1002		
Δ	Strain relief	CM-22C	CM-22B	CM-22B	CM-22B	CM-22B	
Δ	Cord with plug (mini plug)	PDE-319					
	Front panel assembly	PEA1164	PEA1132	PEA1132	PEA1132	PEA1152	
	Control panel	PNW1948	PNW1948	PNW1948	PNW1948	PNW2009	
	Power button	PAC1569	PAC1569	PAC1569	PAC1569	PAC1590	
	Select button	PAC1570	PAC1570	PAC1570	PAC1570	PAC1591	
	Play button	PAC1571	PAC1571	PAC1571	PAC1571	PAC1592	
	Search button	PAC1572	PAC1572	PAC1572	PAC1572	PAC1593	
	Headphone knob S					PAC1597	
	Knob C	RAC1608	RAC1608	RAC1608	RAC1608		
	Slide knob	RAC1428	RAC1428	RAC1428	RAC1428	PAC1599	
	Tray panel	PNW2025	PNW1949	PNW1949	PNW1949	PNW2011	
	Display window	PAM1503	PAM1488	PAM1488	PAM1503	PAM1488	
	Bonnet	PYY1148	PYY1148	PYY1148	PYY1148	PYY1154	
	CD packing case	PHG1679	PHG1678	PHG1678	PHG1678	PHG1680	For packing

*1: As to the parts list of the Mother board assembly, refer to page 12.

*2: These assemblies are the same as the PD-31/KU type for the service supply parts.

Mark	Symbol & Description	Part No.					Remarks
		PD-31/KU	PD-8700/HEM	PD-8700/HB	PD-8700/SD	PD-8700-S/HEWM	
	Operating instructions(English)	PRB1151		PRB1139	PRB1139		
	Operating instructions (English/French)		PRE1142				
	Operating instructions (German/Italian/Dutch/Swedish /Spanish/Portuguese)		PRF1042			PRP1042	
	Operating instructions (Spanish)				PRC1035		

9. FOR PD-7700/KU, KC, HEM, HB, SD, HPW AND PD-7700-S/HEWM TYPES

9.1 CONTRAST OF MISCELLANEOUS PARTS

NOTES:

- Parts without part number cannot be supplied.
- Parts marked by "●" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

The PD-7700/KU, KC, HEM, HB, SD, HPW and PD-7700-S/HEWM types are the same as the PD-31/KU type with the exception of the following sections.

Mark	Symbol & Description	Part No.								Remarks
		PD-31/KU	PD-7700/KU	PD-7700/KC	PD-7700/HEM	PD-7700/HB	PD-7700/SD	PD-7700/HPW	PD-7700-S/HEWM	
Δ●	Mother board assembly	PWM1448	PWM1444	PWM1444	PWM1445	PWM1445	PWM1447	PWM1444	PWM1445	
Δ●	Audio board assembly	PWZ2118	
Δ	S trans board assembly	Non supply	
Δ	A trans board assembly	Non supply	
Δ●	Operate board assembly	PWZ2112	PWZ2111	Non supply	PWZ2111	Non supply	PWZ2111	Non supply	PWZ2111	
Δ	SW board assembly	Non supply	Non supply	Non supply	Non supply	Non supply	Non supply	Non supply	Non supply	
Δ	Headphone board assembly	Non supply	Non supply	Non supply	Non supply	Non supply	Non supply	Non supply	Non supply	
Δ	Jack board assembly	Non supply	
Δ	Voltage selector	PSB1002	
Δ	Power transformer S(AC120V)	PTT1179	PTT1179	PTT1179	
Δ	Power transformer S(AC220-240V)	PTT1178	PTT1178	PTT1178	PTT1178	
Δ	Power transformer S(AC110, 120-127, 220, 240V)	PTT1181	
Δ	Power transformer A(AC120V)	PTT1183	
Δ	AC power cord	PDG1015	PDG1015	PDG1015	PDG1003	PDG1036	PDG1013	PDG1006	PDG1003	
Δ	Strala relief	CM-22C	CM-22C	CM-22C	CM-22B	CM-22B	CM-22B	CM-22B	CM-22B	
Δ	Front panel assembly	PEA1164	PEA1133	PEA1133	PEA1133	PEA1133	PEA1133	PEA1133	PEA1153	
Δ	Control panel	PNW1948	PNW1948	PNW1948	PNW1948	PNW1948	PNW1948	PNW1948	PNW2009	
Δ	Power button	PAC1569	PAC1569	PAC1569	PAC1569	PAC1569	PAC1569	PAC1569	PAC1590	
Δ	Select button	PAC1570	PAC1570	PAC1570	PAC1570	PAC1570	PAC1570	PAC1570	PAC1591	
Δ	Play button	PAC1571	PAC1571	PAC1571	PAC1571	PAC1571	PAC1571	PAC1571	PAC1592	
Δ	Search button	PAC1572	
Δ	Headphone knob	PAC1600	PAC1600	PAC1600	PAC1600	PAC1600	PAC1600	PAC1601	
Δ	Slide knob	RAC1428	
Δ	Knob C	RAC1608	
Δ	Display window	PAM1503	PAM1503	PAM1503	PAM1488	PAM1488	PAM1503	PAM1503	PAM1488	
Δ	Cord with plug (mini plug)	PDE-319	
Δ	Tray panel	PNW2025	PNW1949	PNW1949	PNW1949	PNW1949	PNW1949	PNW1949	PNW2011	
Δ	Bonnet	PYY1148	PYY1148	PYY1148	PYY1148	PYY1148	PYY1148	PYY1148	PYY1154	
Δ	CD packing case	PHG1679	PHG1683	PHG1683	PHG1681	PHG1681	PHG1681	PHG1681	PHG1682	
Δ	Stopper	PNM1134	PNM1070	PNM1070	PNM1070	PNM1070	PNM1070	PNM1070	PNM1070	
Δ	Insulator	PNW2020	VNK1095	VNK1095	VNK1095	VNK1095	VNK1095	VNK1095	VNK1095	
Δ	Cord clamper	RNH-184	
Δ	BIAS lens	RNK1674	
Δ	Operating instructions(English)	PRB1151	PRB1139	PRB1139	PRB1139	PRB1139	
Δ	Operating instructions(English/French)	PRE1142	PRE1142	PRF1042	
Δ	Operating instructions (German/Italian/Dutch/Swedish/Spanish/Portuguese)	PRF1042	
Δ	Operating instructions(Spanish)	PRC1035	

For Packing

9.2 P.C.B.'s PARTS LIST

NOTES:

- Parts without part number cannot be supplied.
- Parts marked by "Ⓢ" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.
- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J = 5%, and K = 10%).

560Ω	56 × 10 ³	561	RD1/4PS561J
47kΩ	47 × 10 ³	473	RD1/4PS473J
0.5Ω	0R5		RD2H0R5K
1Ω	010		RD1P010K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ	562 × 10 ³	5621	RD1/4SR5621F
--------	-----------------------	------	--------------


Mark	No.	Description	Parts No.	Mark	No.	Description	Parts No.
● MOTHER BOARD ASSEMBLY				COILS			
(PWM1444: PD-7700/KU, KC and HPW types)				L383	AXIAL INDUCTOR	LAU010K	
(PWM1445: PD-7700/HEM, HB and PD-7700-S/HEWM types)				L394	AXIAL INDUCTOR	LAU010K	
(PWM1447: PD-7700/SD type)				CAPACITORS			
SEMICONDUCTORS				C11, C13	CERAMIC CAPACITOR	CKCYF108Z50	
Δ	IC20	REGULATOR IC	M5298P	C15, C16	CERAMIC CAPACITOR	CKCYF108Z50	
	IC21	REGULATOR IC	NJM78L05A	C25	ELECTROLYTIC CAPACIT	CEAS472M16	
	IC22	REGULATOR IC	NJM79L05A	C26	ELECTR. CAPACITOR	CEAS222M16	
	IC23	REGULATOR IC	NJM7805FA	C27	ELECTROLYTIC CAPACIT	CEAS471M6R3	
Δ	IC31	IC(PWM1445, PWM1447 only)	ICP-N10	C28	ELECTR. CAPACITOR	CEAS101M30	
	IC101	PRE AMP IC	CXA1471S	C52	ELECTR. CAPACITOR	CEAS101M35	
	IC151	SERVO IC	CXA1372S	C60	ELECTR. CAPACITOR	CEAS010M50	
Δ	IC201, IC202	POWER OP-AMP IC	LA6520	C61, C62	ELECTR. CAPACITOR	CEAS101M16	
	IC301	EFM DEMODULATION IC	CXD2500AQ	C63	ELECTR. CAPACITOR	CEAS102M16	
	IC401	D/A CONVERTER, IC	PD2026A	C101, C102	ELECTR. CAPACITOR	CEAS101M10	
	IC402	OP-AMP IC	M5238PF	C103	CERAMIC CAPACITOR	CGCC8200J30	
	IC402	OP-AMP IC (PWM1444, PWM1447 only)		C104	ELECTR. CAPACITOR	CEAS101M10	
	IC402	OP-AMP IC (PWM1445 only)	NJM5532DD	C110	CERAMIC CAPACITOR	CKCYF108Z50	
	Q101	TRANSISTOR	2SA854S	C151-C153	ELECTR. CAPACITOR	CEAS101M10	
	Q321, Q351	TRANSISTOR	DTC124ES	C155	CERAMIC CAPACITOR	CKCYB182K50	
	Q391	TRANSISTOR	2SC1740S	C156	CERAMIC CAPACITOR	CGCYX333K25	
	Q401-Q404	TRANSISTOR	2SD2144S	C157	CERAMIC CAPACITOR	CGCYX108K25	
	Q405	TRANSISTOR	DTC124ES	C158, C169	CERAMIC CAPACITOR	CGCYX104K25	
	Q406	TRANSISTOR	DTA124ES	C160	ELECTR. CAPACITOR	CEAS4R7M50	
	Q451, Q452	TRANSISTOR	DTA124ES	C161	CERAMIC CAPACITOR	CGCYX104K25	
	Q453, Q454	TRANSISTOR	2SB1296	C162	ELECTR. CAPACITOR	CEAS010M50	
Δ	D11-D14, D52	DIODE	11ES2	C163	CERAMIC CAPACITOR	CGCYX104K25	
	D54	ZENNER DIODE	MTZJ18B	C164	CERAMIC CAPACITOR	CGCYX103K25	
	D301	DIODE	1SS254	C167	CERAMIC CAPACITOR	CKCYF108Z50	
	D391-D394	DIODE(PWM1444 only)	1SS254	C168	CERAMIC CAPACITOR	CGCYX333K25	
	D395-D397	DIODE	1SS254	C169	CERAMIC CAPACITOR	CGCYX103K25	
	D451, D452	DIODE	1SS254	C170	CERAMIC CAPACITOR	CKCYB332K50	
				C171, C172	CERAMIC CAPACITOR	CKCYB472K50	
				C202, C207	CERAMIC CAPACITOR	CKCYF108Z50	

Mark	No.	Description	Parts No.
	C212	CERAMIC CAPACITOR	CKCYB272K50
	C216, C217	ELECTR. CAPACITOR	CEAS330M16
	C301	CERAMIC CAPACITOR	CGCYX104K25
	C302	ELECTROLYTIC CAPACIT	CEAS471M6R3
	C306	CERAMIC CAPACITOR	CKCYB152K50
	C307	CERAMIC CAPACITOR	GGCYX473K25
	C308	CERAMIC CAPACITOR	GGCYX103K25
	C309	ELECTR. CAPACITOR	CEASR47M50
	C321	CERAMIC CAPACITOR	GGCYX104K25
	C324	CERAMIC CAPACITOR	CKCYF103Z50
	C361	CERAMIC CAPACITOR	CKCYF103Z50
	C362	CERAMIC CAPACITOR	CKCYB102K50
	C391, C392	CERAMIC CAPACITOR (PWM1444 only)	CCCSL101J60
	C393, C394	CERAMIC CAPACITOR	CKCYF103Z50
	C395	CERAMIC CAPACITOR (PWM1444 only)	CKCYF103Z50
	C397	CERAMIC CAPACITOR	CKCYF103Z50
	C403	CERAMIC CAPACITOR	CCOCH220J50
	C404	CERAMIC CAPACITOR	CCOCH120J50
	C413-C416	AUDIO FILM CAPACITOR	CFTXA104J50
	C429, C430	CERAMIC CAPACITOR	CCOCH390J50
	C431, C432	ELECTR. CAPACITOR	CEAS330M16
	C433, C434	ELECTR. CAPACITOR	CEAS470M50
	C435-C438	CERAMIC CAPACITOR	CCOCH390J50
	C441, C442	PL. STYRENE CAPACITOR	CQSA102J50
	C451, C452	ELECTR. CAPACITOR	CEAS330M16
	C453	CERAMIC CAPACITOR	CKCYF103Z50
RESISTORS			
	VR102	VR	VRTB6VS223
	VR103	VR	VRTB6VS102
	VR151	VR	VRTB6VS223
	VR152	VR	VRTB6VS223
	R391	CARBON FILM RESISTOR (PWM1444 only)	RD1/6PM244J
	R392	CARBON FILM RESISTOR (PWM1444 only)	RD1/6PM102J
		Other resistors	RD1/6PM□□□□
OTHERS			
	CN101	CONNECTOR	52045-1610
	JA801	OPTICAL OUTPUT JACK	TOTX178
	JA391	JACK /12V (PWM1444 only)	PKN1004
	JA392	JACK /12V (PWM1444 only)	PKN1004
	JA393	JACK (mini)	PKN1006
	JA401	JACK (2P)	PKB1009
	X401	XTAL RES (OSC)	PSS1006




Mark	No.	Description	Parts No.
● OPERATE BOARD ASSEMBLY (PWZ2111)			
SEMICONDUCTORS			
	IC701	MICROCOMPUTER, IC	PD4336A
	D701-D714	DIODE	ISS254
SWITCHES			
	S701-S742	SWITCH	PSG1006
		1-20, PGM, DELETE, CHECK, CLEAR, >20, RESERVE, REPEAT, TIME, RND, PEAK SEARCH, O/L, HI LITE SCAN, AUTO SPACE, COMPU, TIME FADE, <4, >4, <4, >4, STOP(□), PLAY(>)	
CAPACITORS			
	C701	ELECTR. CAPACITOR	CEAS330M16
	C702-C714	AXIAL CAPACITOR	CKPUYB221K50
RESISTORS			
		All resistors	RD1/6PM□□□□J
OTHERS			
	V701	FL INDICATOR TUBE	PEL1057
	X701	CERAMIC RESONATOR	VSS1014
		PHOTO SENSOR UNIT	GP1U60X
SW BOARD ASSEMBLY			
SEMICONDUCTORS			
	D715	LED	PCX1018
SWITCHES			
	S743	SWITCH (ON/STN BY)	PSG1006
HEADPHONE BOARD ASSEMBLY			
SEMICONDUCTORS			
	IC501	OP-AMP, IC	ME218AL
COILS			
	L501-L505	AXIAL INDUCTOR	LAU010K
CAPACITORS			
	C501, C502	ELECTR. CAPACITOR	CEAS330M16
	C505-C507	CERAMIC CAPACITOR	CKCYF103Z50
RESISTORS			
	VR501	VARIABLE RESISTOR	PCS1002
		Other resistors	RD1/6PM□□□□J
OTHERS			
	JA501	JACK	RKN1001

A
B
C







_____ : CD SIGNAL
 (F) _____ : FOCUS SERVO SIGNAL
 (T) _____ : TRACKING SERVO SIGNAL
 (S) _____ : SPINDLE SERVO SIGNAL
 (C) _____ : CARRIAGE SERVO SIGNAL
 (L) _____ : LOADING SERVO SIGNAL

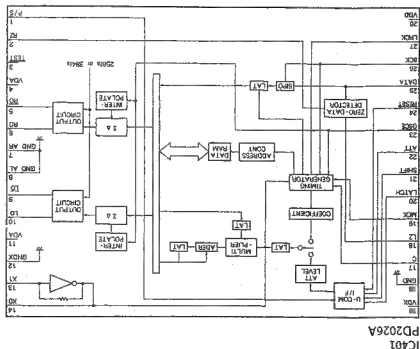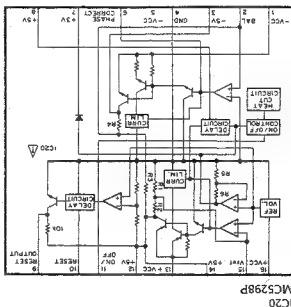


9.3 WAVEFORMS


Note: The encircled numbers denote measuring in the schematic diagram.

*1.50T - JUMP: After switching to the pause mode, press the manual search key.
*2.FOCUS-IN: Press the key without loading a disc.

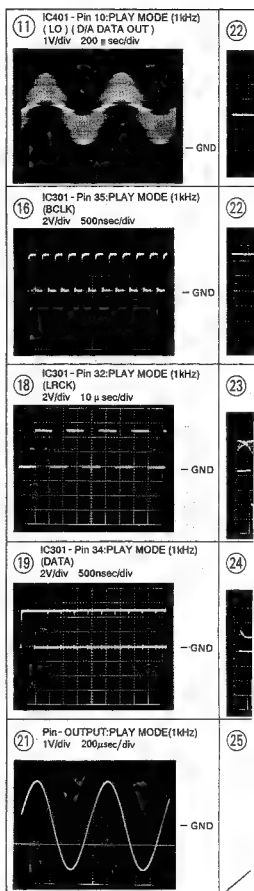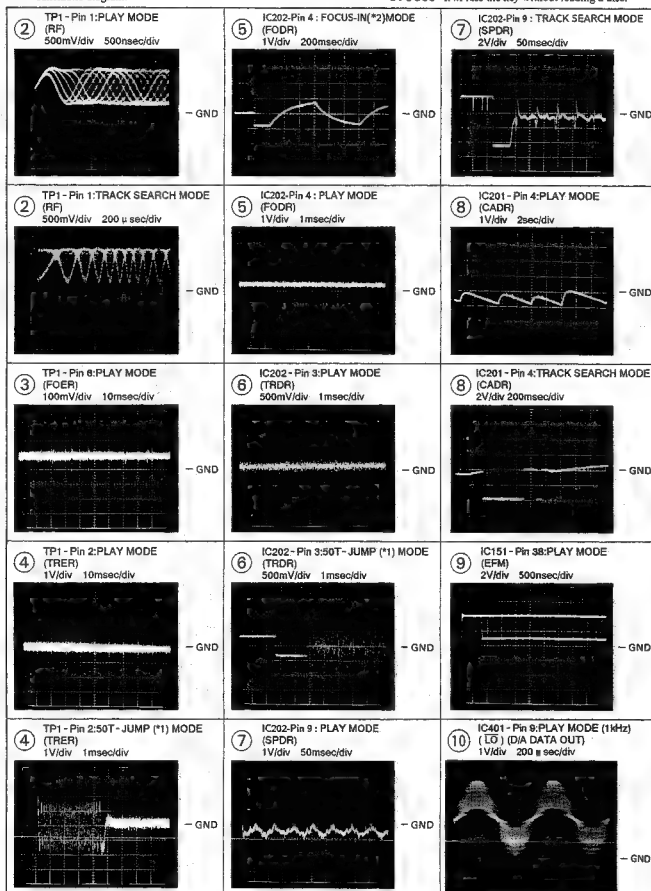

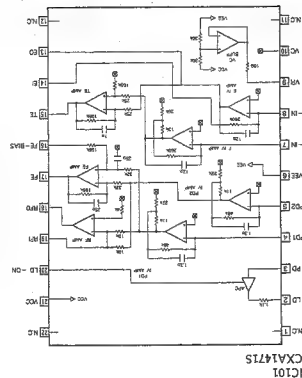

- IC BLOCK DIAGRAM

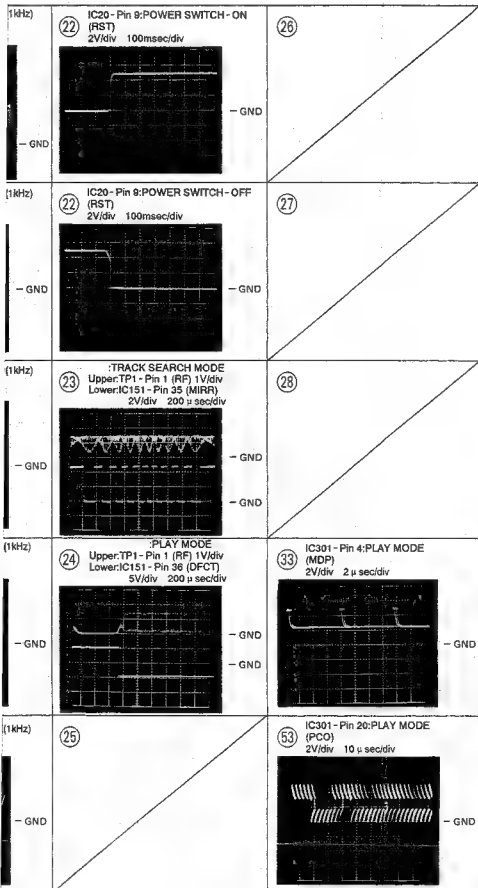


- | Parts No. | Description |
|-----------|-------------|
| AXX-193 | 220V label |
| AXX-192 | 240V label |

9.5 P.C.BOARDS CONNECTION DIAGRAM


A

POWER SUPPLY SECTION FOR HEM,HB,HPW AND HEWM TYPES

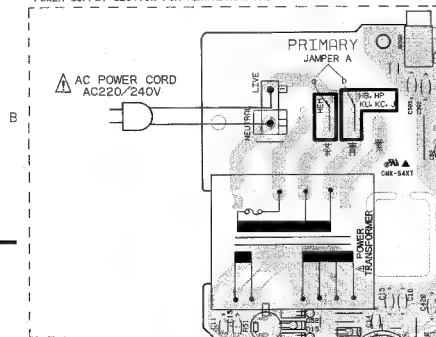

C


POWER SUPPLY SECTION FOR SD TYPE

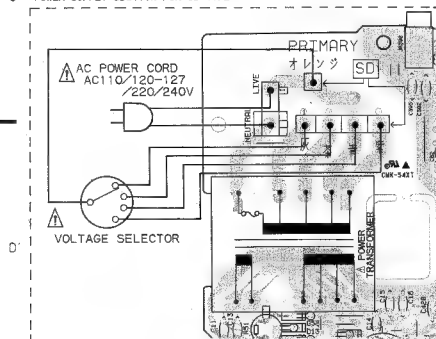

D

MOTHER BOARD ASSEMBLY
(PWM1444:KU,KC AND HPW TYPES)
(PWM1445:HEM,HB AND HEWM TYPES)
(PWM1447:SD TYPE)

POWER SUPPLY SECTION FOR KU AND KC TYPES

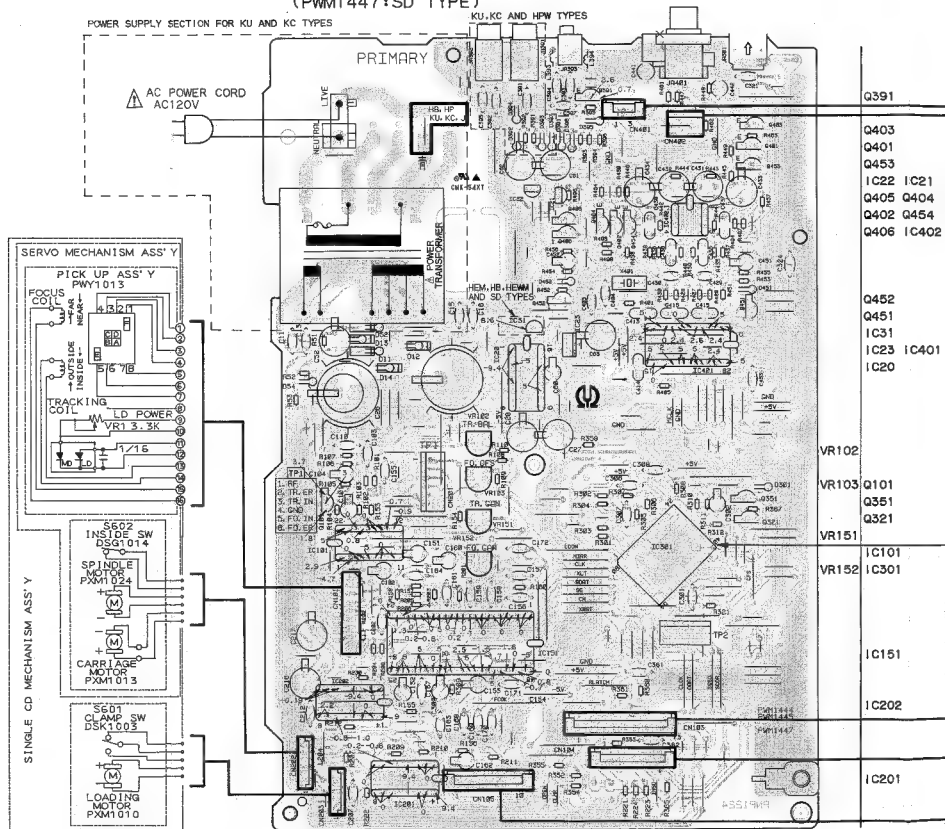

Q391

Q403
Q401
Q453
IC22 IC21
Q405 Q404
Q402 Q454
Q406 IC402

Q452
Q451
IC31
IC23 IC401
IC20

VR102

VR103 Q101
Q351
Q321


VR151
VR152 IC101
IC301

IC151

IC202


IC201

HEADPHONE BOARD ASSEMBLY




IC501

SW BOARD ASSEMBLY







OPERATE BOARD ASSEMBLY(PWZ2111)

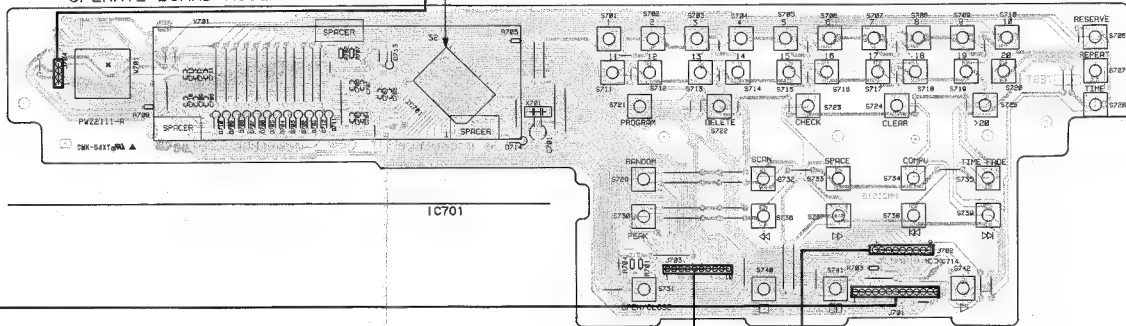

P.C.B. pattern diagram indication	Corresponding part symbol	Part name	P.C.B. pattern diagram indication	Corresponding part symbol	Part name
		Resistor			Capacitor
		Diode			Transistor
		LED			Transformer
		Inductor			Relay
		Coil			Switch
		Transformer			Connector
		Fiber			

- This P.C.B. connection diagram is viewed from the parts mounted side.
- The parts which have holes mounted on the board can be replaced with those shown with the corresponding wiring symbols listed in the above table.
- The capacitor terminal marked with shows negative terminal.
- The diode marked with G shows cathode side.
- The capacitor terminal marked with shows positive.

Y'22A M21NACH3M QD B_LDN12

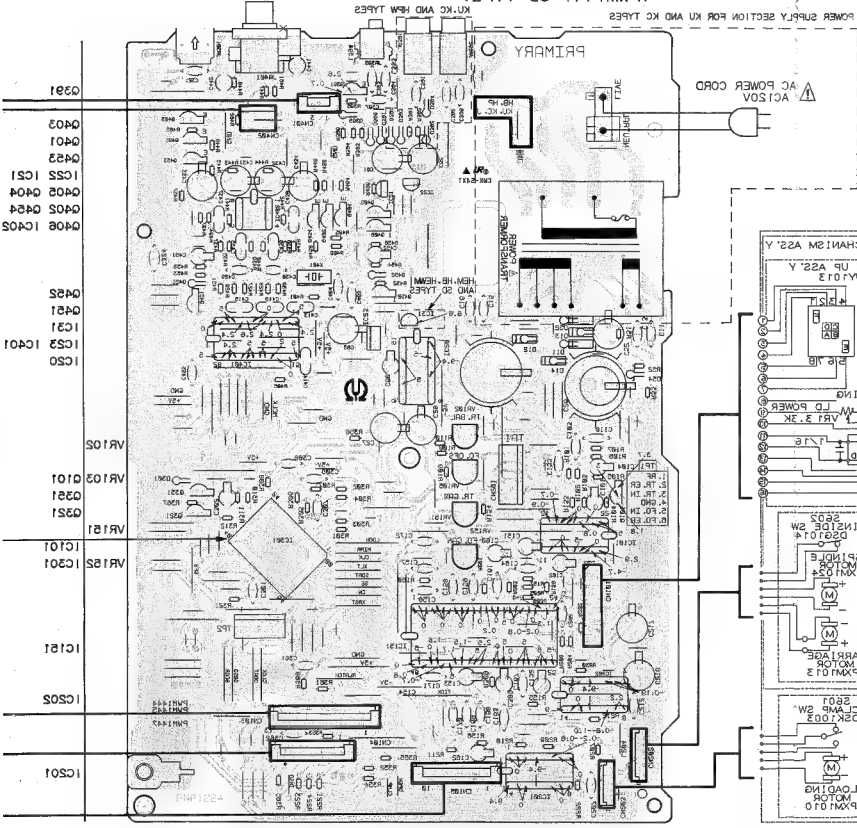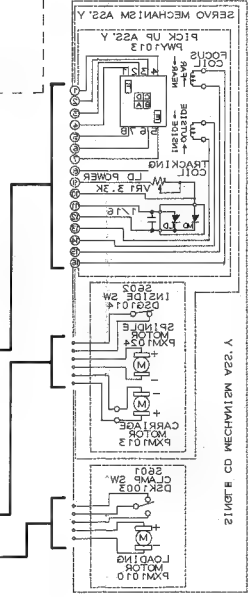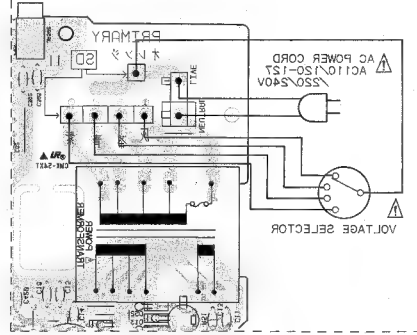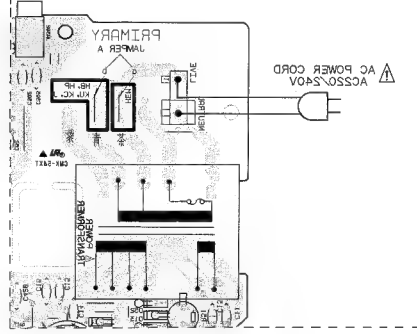

BB-2200-2\HWW KC HEW HB SD HPW

This P.C.B. connection diagram is viewed from the foil side.


A

B


C

D

HOLE		HOLE	
NO.	SIZE	NO.	SIZE
1	0.063	11	0.063
2	0.063	12	0.063
3	0.063	13	0.063
4	0.063	14	0.063
5	0.063	15	0.063
6	0.063	16	0.063
7	0.063	17	0.063
8	0.063	18	0.063
9	0.063	19	0.063
10	0.063	20	0.063
21	0.063	22	0.063
23	0.063	24	0.063
25	0.063	26	0.063
27	0.063	28	0.063
29	0.063	30	0.063
31	0.063	32	0.063
33	0.063	34	0.063
35	0.063	36	0.063
37	0.063	38	0.063
39	0.063	40	0.063
41	0.063	42	0.063
43	0.063	44	0.063
45	0.063	46	0.063
47	0.063	48	0.063
49	0.063	50	0.063
51	0.063	52	0.063
53	0.063	54	0.063
55	0.063	56	0.063
57	0.063	58	0.063
59	0.063	60	0.063
61	0.063	62	0.063
63	0.063	64	0.063
65	0.063	66	0.063
67	0.063	68	0.063
69	0.063	70	0.063
71	0.063	72	0.063
73	0.063	74	0.063
75	0.063	76	0.063
77	0.063	78	0.063
79	0.063	80	0.063
81	0.063	82	0.063
83	0.063	84	0.063
85	0.063	86	0.063
87	0.063	88	0.063
89	0.063	90	0.063
91	0.063	92	0.063
93	0.063	94	0.063
95	0.063	96	0.063
97	0.063	98	0.063
99	0.063	100	0.063




OPERATE BOARD ASSEMBLY(PW2211)

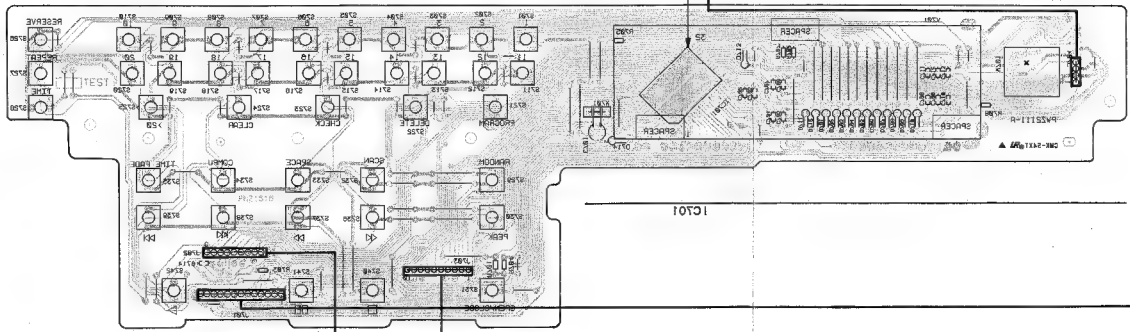

HOLE		HOLE	
NO.	SIZE	NO.	SIZE
1	0.063	11	0.063
2	0.063	12	0.063
3	0.063	13	0.063
4	0.063	14	0.063
5	0.063	15	0.063
6	0.063	16	0.063
7	0.063	17	0.063
8	0.063	18	0.063
9	0.063	19	0.063
10	0.063	20	0.063
21	0.063	22	0.063
23	0.063	24	0.063
25	0.063	26	0.063
27	0.063	28	0.063
29	0.063	30	0.063
31	0.063	32	0.063
33	0.063	34	0.063
35	0.063	36	0.063
37	0.063	38	0.063
39	0.063	40	0.063
41	0.063	42	0.063
43	0.063	44	0.063
45	0.063	46	0.063
47	0.063	48	0.063
49	0.063	50	0.063
51	0.063	52	0.063
53	0.063	54	0.063
55	0.063	56	0.063
57	0.063	58	0.063
59	0.063	60	0.063
61	0.063	62	0.063
63	0.063	64	0.063
65	0.063	66	0.063
67	0.063	68	0.063
69	0.063	70	0.063
71	0.063	72	0.063
73	0.063	74	0.063
75	0.063	76	0.063
77	0.063	78	0.063
79	0.063	80	0.063
81	0.063	82	0.063
83	0.063	84	0.063
85	0.063	86	0.063
87	0.063	88	0.063
89	0.063	90	0.063
91	0.063	92	0.063
93	0.063	94	0.063
95	0.063	96	0.063
97	0.063	98	0.063
99	0.063	100	0.063

HEADPHONE BOARD ASSEMBLY



IC501
IC502
IC503
IC504
IC505
IC506
IC507
IC508
IC509
IC510
IC511
IC512
IC513
IC514
IC515
IC516
IC517
IC518
IC519
IC520
IC521
IC522
IC523
IC524
IC525
IC526
IC527
IC528
IC529
IC530
IC531
IC532
IC533
IC534
IC535
IC536
IC537
IC538
IC539
IC540
IC541
IC542
IC543
IC544
IC545
IC546
IC547
IC548
IC549
IC550
IC551
IC552
IC553
IC554
IC555
IC556
IC557
IC558
IC559
IC560
IC561
IC562
IC563
IC564
IC565
IC566
IC567
IC568
IC569
IC570
IC571
IC572
IC573
IC574
IC575
IC576
IC577
IC578
IC579
IC580
IC581
IC582
IC583
IC584
IC585
IC586
IC587
IC588
IC589
IC590
IC591
IC592
IC593
IC594
IC595
IC596
IC597
IC598
IC599
IC600
IC601
IC602
IC603
IC604
IC605
IC606
IC607
IC608
IC609
IC610
IC611
IC612
IC613
IC614
IC615
IC616
IC617
IC618
IC619
IC620
IC621
IC622
IC623
IC624
IC625
IC626
IC627
IC628
IC629
IC630
IC631
IC632
IC633
IC634
IC635
IC636
IC637
IC638
IC639
IC640
IC641
IC642
IC643
IC644
IC645
IC646
IC647
IC648
IC649
IC650
IC651
IC652
IC653
IC654
IC655
IC656
IC657
IC658
IC659
IC660
IC661
IC662
IC663
IC664
IC665
IC666
IC667
IC668
IC669
IC670
IC671
IC672
IC673
IC674
IC675
IC676
IC677
IC678
IC679
IC680
IC681
IC682
IC683
IC684
IC685
IC686
IC687
IC688
IC689
IC690
IC691
IC692
IC693
IC694
IC695
IC696
IC697
IC698
IC699
IC700
IC701
IC702
IC703
IC704
IC705
IC706
IC707
IC708
IC709
IC710
IC711
IC712
IC713
IC714
IC715
IC716
IC717
IC718
IC719
IC720
IC721
IC722
IC723
IC724
IC725
IC726
IC727
IC728
IC729
IC730
IC731
IC732
IC733
IC734
IC735
IC736
IC737
IC738
IC739
IC740
IC741
IC742
IC743
IC744
IC745
IC746
IC747
IC748
IC749
IC750
IC751
IC752
IC753
IC754
IC755
IC756
IC757
IC758
IC759
IC760
IC761
IC762
IC763
IC764
IC765
IC766
IC767
IC768
IC769
IC770
IC771
IC772
IC773
IC774
IC775
IC776
IC777
IC778
IC779
IC780
IC781
IC782
IC783
IC784
IC785
IC786
IC787
IC788
IC789
IC790
IC791
IC792
IC793
IC794
IC795
IC796
IC797
IC798
IC799
IC800
IC801
IC802
IC803
IC804
IC805
IC806
IC807
IC808
IC809
IC810
IC811
IC812
IC813
IC814
IC815
IC816
IC817
IC818
IC819
IC820
IC821
IC822
IC823
IC824
IC825
IC826
IC827
IC828
IC829
IC830
IC831
IC832
IC833
IC834
IC835
IC836
IC837
IC838
IC839
IC840
IC841
IC842
IC843
IC844
IC845
IC846
IC847
IC848
IC849
IC850
IC851
IC852
IC853
IC854
IC855
IC856
IC857
IC858
IC859
IC860
IC861
IC862
IC863
IC864
IC865
IC866
IC867
IC868
IC869
IC870
IC871
IC872
IC873
IC874
IC875
IC876
IC877
IC878
IC879
IC880
IC881
IC882
IC883
IC884
IC885
IC886
IC887
IC888
IC889
IC890
IC891
IC892
IC893
IC894
IC895
IC896
IC897
IC898
IC899
IC900
IC901
IC902
IC903
IC904
IC905
IC906
IC907
IC908
IC909
IC910
IC911
IC912
IC913
IC914
IC915
IC916
IC917
IC918
IC919
IC920
IC921
IC922
IC923
IC924
IC925
IC926
IC927
IC928
IC929
IC930
IC931
IC932
IC933
IC934
IC935
IC936
IC937
IC938
IC939
IC940
IC941
IC942
IC943
IC944
IC945
IC946
IC947
IC948
IC949
IC950
IC951
IC952
IC953
IC954
IC955
IC956
IC957
IC958
IC959
IC960
IC961
IC962
IC963
IC964
IC965
IC966
IC967
IC968
IC969
IC970
IC971
IC972
IC973
IC974
IC975
IC976
IC977
IC978
IC979
IC980
IC981
IC982
IC983
IC984
IC985
IC986
IC987
IC988
IC989
IC990
IC991
IC992
IC993
IC994
IC995
IC996
IC997
IC998
IC999
IC1000

87

15

11


10

9

8

7


10. PANEL FACILITIES

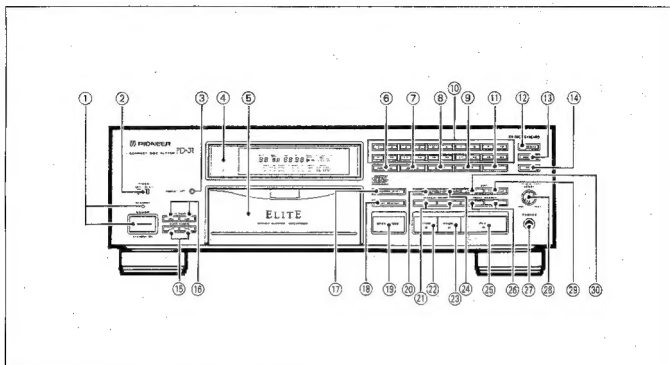

FRONT PANEL

- ① **POWER STANDBY/ON switch and indicator**
Press this switch to turn the power on. The unit will set to the standby mode and the STANDBY indicator will light.
- ② **TIMER OFF/PLAY switch**
- ③ **DISPLAY OFF button**
- ④ **Remote sensor**
- ⑤ **Disc tray**
- ⑥ **PROGRAM button**
- ⑦ **DELETE button**
- ⑧ **CHECK button**
- ⑨ **CLEAR button**
- ⑩ **Track number buttons (1—20)**
- ⑪ **>20 button**
- ⑫ **RESEVRE button**
- ⑬ **REPEAT button**
- ⑭ **TIME button**
- ⑮ **AUTO FADER buttons (—, —)**
- ⑯ **INDEX SEARCH buttons (←, →)**
- ⑰ **RANDOM PLAY button**
- ⑱ **PEAK SEARCH button**
- ⑲ **OPEN/CLOSE button**
- ⑳ **HI-LITE SCAN button**

- ㉑ **MANUAL SEARCH buttons (◀, ▶)**
- ㉒ **STOP button (■)**
- ㉓ **PAUSE button (⏸)**
- ㉔ **AUTO SPACE button**
- ㉕ **PLAY button (▶)**
- ㉖ **TRACK SEARCH buttons (◀◀, ▶▶)**
- ㉗ **Headphones jack (PHONES)**
- ㉘ **Headphones/line volume control (PHONES/LINE LEVEL)**
- ㉙ **TIME FADE EDIT button**
- ㉚ **Program edit button (EDIT) (■ COMPU/■ AUTO)**

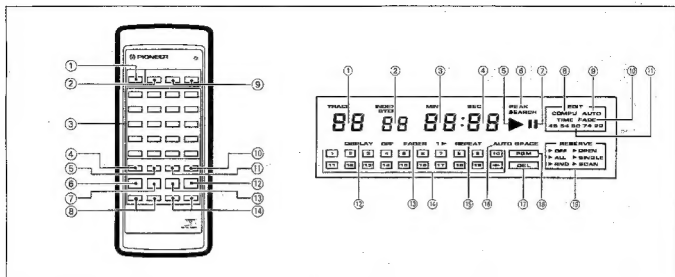

REMOTE CONTROL UNIT

Buttons listed here but not accompanied with explanations have the same functions as the corresponding front panel buttons.

- ① POWER button
- ② OPEN/CLOSE button
- ③ Track number buttons (1—20)
- ④ HI-LITE SCAN button
- ⑤ RESERVE button
- ⑥ RANDOM PLAY button
- ⑦ STOP button (■)
- ⑧ Manual search buttons (MANUAL ◀◀, ▶▶)
- ⑨ OUTPUT LEVEL buttons (—, +)
- ⑩ > 20 button
- ⑪ PROGRAM button
- ⑫ PLAY button (▶)
- ⑬ PAUSE button (⏸)
- ⑭ Track search buttons (TRACK ◀◀, ▶▶)

DISPLAY

- ① Displays track numbers (01—99) during playback or track search.
- ② Displays index numbers (sub-divisions of tracks); during program input, indicates program steps.
- ③ Displays track playing time and remaining time (minutes).
- ④ Displays track playing time and remaining time (seconds).
- ⑤ Lights during playback.
- ⑥ Lights when peak volume levels on the disc are detected.
- ⑦ Lights during playback pause.
- ⑧ Lights during use of computer allocated program editing or auto program editing.
- ⑨ Lights during auto program editing.
- ⑩ Lights during time fade editing.
- ⑪ Indicates the editing time.
- ⑫ Lights when display is in OFF mode.
- ⑬ Lights during operation of fade function.
- ⑭ Calendar display. Lighted numbers indicate total number of tracks on the disc (during program input and program playback, indicates programmed tracks). When a track completes playback, the corresponding lighted number goes out. Arrow mark (➡) lights for tracks higher than "19".
- ⑮ Lights during repeat playback. (During single-track repeat, the [1▶] indicator also lights).
- ⑯ Lights during auto space.
- ⑰ Lights during delete mode.
- ⑱ Lights during program mode.
- ⑲ When "reserve" function is activated, these indicators light in correspondence to the reserved functions (OFF, OPEN, ALL, SINGLE, RND, SCAN).

11. SPECIFICATIONS

1. General

Type	Compact disc digital audio system
Usable discs	Compact Disc
Power requirements	AC 120V, 60Hz
Power consumption	18W
Operating temperature	+5°C—+35°C (+41°F—+95°F)
Weight	5.0kg (11lb)
External dimensions	420(W) × 274(D) × 135(H)mm 16.9 / 16(W) × 10.13/16(D) × 5.5/16(H) in.

2. Audio section

Frequency response	2Hz—20kHz ±0.5dB
S/N	108dB or more (EIAJ)
Dynamic range	97dB or more (EIAJ)
Channel separation	102dB or more (EIAJ)
Total harmonic distortion	0.0022% or less (EIAJ)
Wow and flutter	Limit of measurement (±0.001% W.PEAK) or less (EIAJ)
Number of channels	2 channels (stereo)

3. Output terminal

- Audio line output terminals (FIXED)
- Audio line output terminals (VARIABLE)
- CD-DECK SYNCHRO terminal
- Headphone jack (with motor drive volume control)
- Optical digital output terminal
- Control input/output terminals

4. Functions

- Play
- Pause
- Stop
- Auto space
- Manual search
- Track search
- Index search
- Peak search
- Hi-lite scan
- Direct selection

- Single track repeat
- All track repeat
- Programmed repeat
- Delete repeat
- Random play repeat
- Programmed random play repeat
- Delete play repeat random
- Programmed playback (up to 24 tracks)
- Delete playback
- Pause program
- Program check
- Program correction
- Program clear
- Auto program edit
- Compu program edit
- Time fade edit
- Digital level control
- Random play
- Programmed random play
- Delete random play
- Fade in/fade out
- Time location
- Reserve
- Display off
- Program hold
- Level hold
- Timer start
- CD-deck synchro

5. Accessories

• Remote control unit	1
• Size AAA/R03 dry cell batteries	2
• Output cable	1
• Control cord	1
• Operating instructions	1

NOTE:

The specifications and design of this product are subject to change without notice, due to improvements.

